

Programmable DC Power Supply

MODEL 62000P SERIES

Key Features:

- Eight models : 62006P-100-25
62006P-300-8
62012P-80-60
62012P-100-50
62012P-600-8
62024P-80-60
62024P-100-50
62050P-100-100
- Wide range of voltage & current combinations with constant power
- Voltage range : 0 ~ 600V
Current range : 0 ~ 100A
Power range : 600W, 1200W, 2400W, 5000W
- Digital encoder knobs, keypad and function keys
- Power Factor Correction (0.95)
- High-speed Programming
- Precision V&I Measurements
- Current sharing for parallel operation with Master/Slave Control
- Auto Sequencing Programming: 10 Programs / 100 Sequences / 8 bit TTL
- Voltage & Current Slew Rate Control
- OVP, Current Limit, Thermal protection
- Remote sense, 5V line loss compensation
- APG (Analog Programmable Interface) with Isolated Analog Interface Card
- Optional GPIB control with SCPI
- Standard RS-232 interface
- LabView and Labwindows
- CE Certified
- Standard USB interface
(available for Model 62024P-80-60, 62024P-100-50, 62050P-100-100)



PROGRAMMABLE DC POWER SUPPLY MODEL 62000P SERIES

Chroma's new 62000P Series of programmable DC power supplies offer many unique advantages for ATE integration and testing. These advantages include a constant power operating envelope, precision readback of output current and voltage, output trigger signals as well as the ability to create complex DC transients waveforms to test device behavior to spikes, drops, and other voltage deviations. Designed for automated testing DC-DC converters and similar products, the 62000P sets a new standard for high accuracy programmable DC supplies.

The 62000P Series includes 8 different models ranging from 600W to 5000W, up to 100A and up to 600V. Due to their constant power operating envelope a single instrument can provide both high voltage/low current AND low voltage/high current thereby reducing the number of supplies needed in typical ATE applications.

The 62000P Series also includes 16 bit readback capability for accurate voltage and current readings. This means systems no longer need complex shunt/multiplexers to make accurate readings of the UUT's input parameters. The instruments also include I/O ports providing 8 bit TTLS, DC-ON, fault output signal and remote inhibit as well as an output trigger signal for system timing measurements.


Another unique capability of the 62000P Series supplies is their ability to create complex DC transient waveforms. This capability allows devices to be tested to DC voltage dropouts, spikes and other voltage variations making them an ideal choice for airborne device testing, inverter testing and other devices which will experience voltage interrupts. Applications include DC/DC Converter & Inverter voltage drop test, engine start-up simulation, battery automated charging, electronic product life cycle test, and etc.



Chroma

WIDE OPERATING REGION WITH CONSTANT POWER

The 62000P Series supplies offer a wide operating region. For example, the output specification for model 62012P-80-60 is 1200W/80V/60A, it allows operating flexibly in various combinations as shown in the figure at the right. As shown conventional power supplies provide the same rated current at all output voltages, however, the 62000P provides greater current at lower output voltages. This means both low voltage/high current and high voltage/low current UUTs can be tested using a single supply avoiding the for multiple supplies saving cost and space within typical ATE systems.

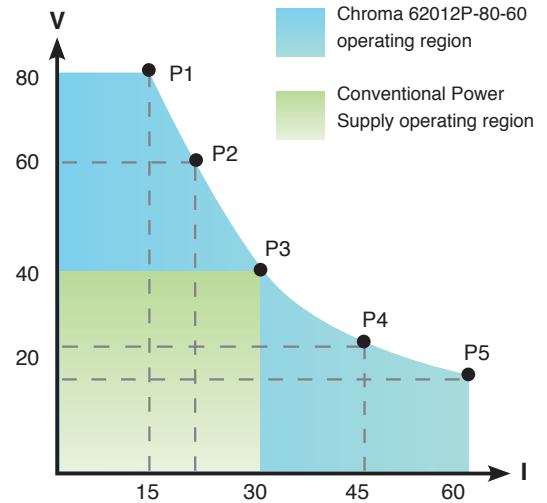


MASTER/SLAVE PARALLEL & SERIAL CONTROL

When high power is required, it is common to connect two or more power supplies in parallel or series. The 62000P Series supplies have a smart Master / Slave control mode making series/parallel operation fast and simple. In this mode the master scales values and downloads data to slave units so programming is simple and current sharing automatic.

Front Panel





Remote GPIB

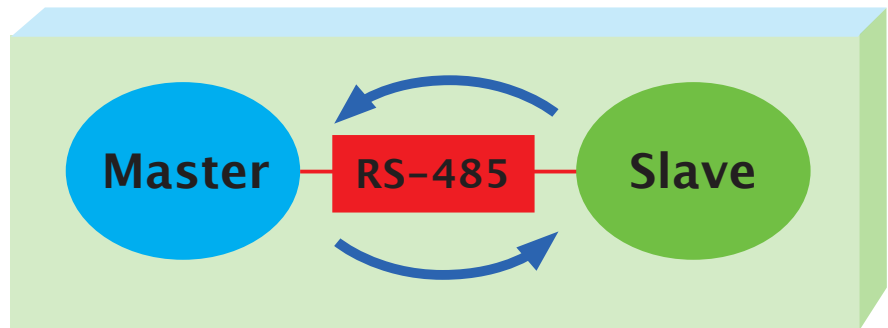


PROGRAMMING SEQUENCES APPLICATIONS


The 62000P Series supplies allow for 100 user programmable sequences with time settings ranging from 10ms to 10000s, voltage /current slew rate control and 8 bit TTL output for automated test applications. Applications include DC/DC Converter & Inverter voltage dropout testing, engine start-up simulation, battery automated charging, product life cycle testing and airborne avionics testing.

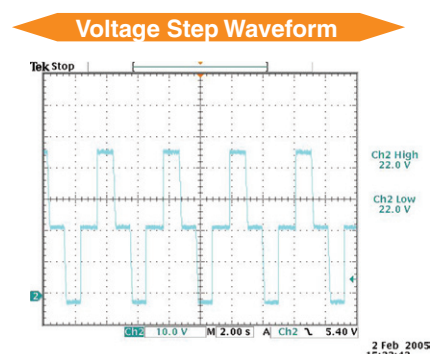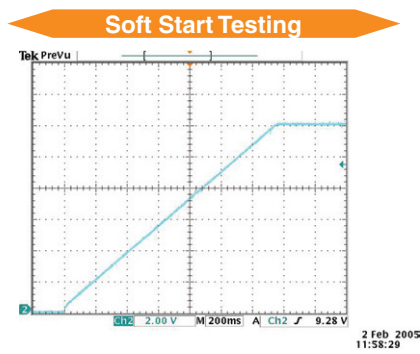


D/D Converter Sag Testing

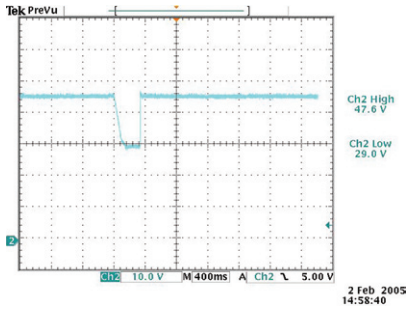


D/D Converter Cycle drop Testing

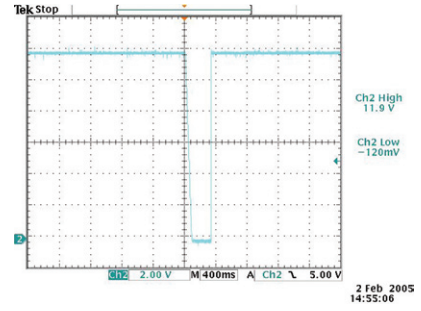


D/D Converter Surge Testing

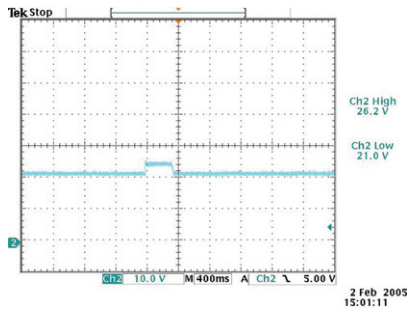


Pulse Charge of Battery

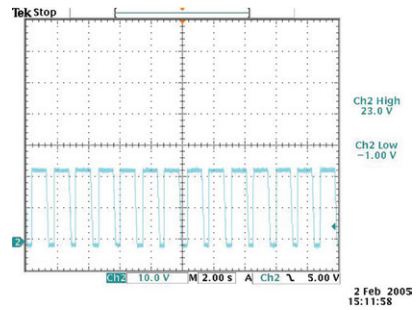


Life Cycle Testing

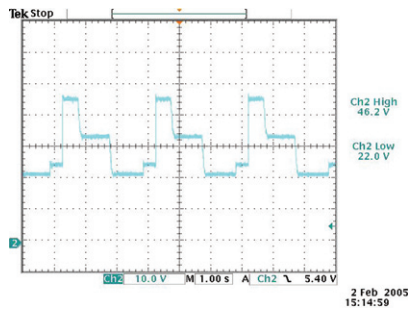


Line Regulation Testing

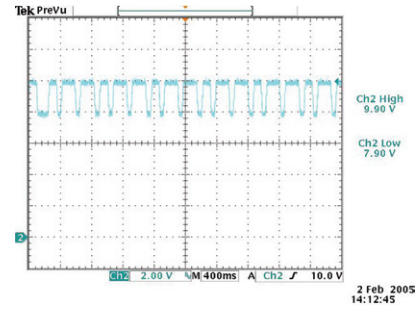


Turn on Time of Setting 80V

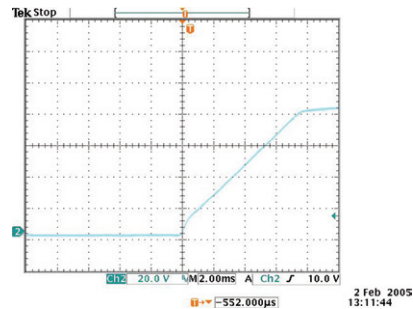

Voltage Sequence Program

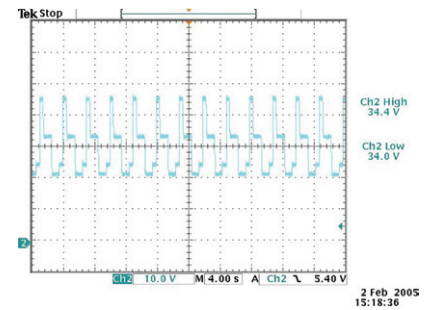


VID code Simulation for VRM/VRD

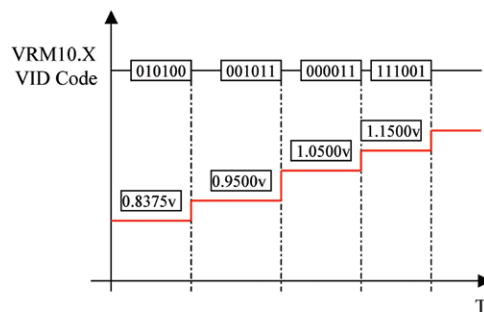


The 62000P Supplies provide 8 output TTL bits with timing control. These control lines can be used for VID control of VRMS or to control other discrete signals.

PANEL DESCRIPTION

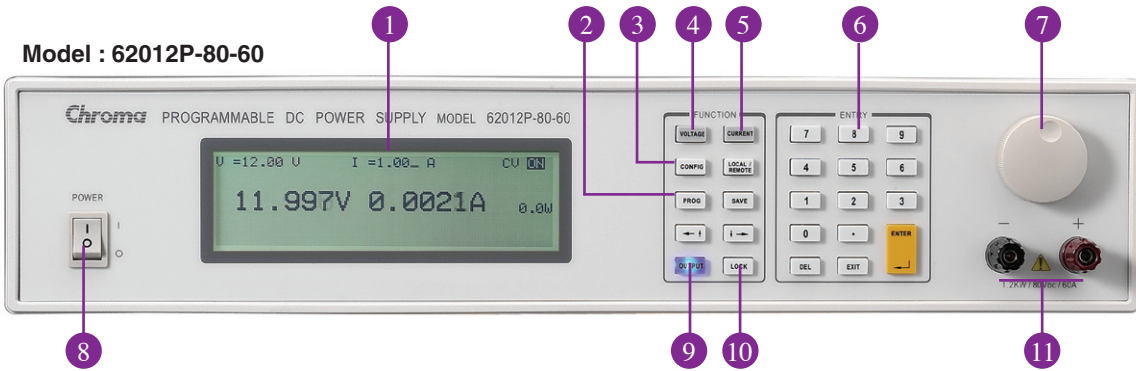

1. LCD Display	Display setting, readings and operating status
2. PROG Key	Program the sequence
3. CONFIG Key	Set the system configuration
4. VOLTAGE Key	Set the output voltage
5. CURRENT Key	Set the output current limit
6. NUMERIC Key	Set the data
7. ROTARY Key	Adjust the V&I and set the parameter
8. POWER Switch	
9. OUTPUT Key	Enable or disable the output
10. LOCK Key	Lock all settings
11. OUTPUT Terminal	Connect the output cable to a UUT

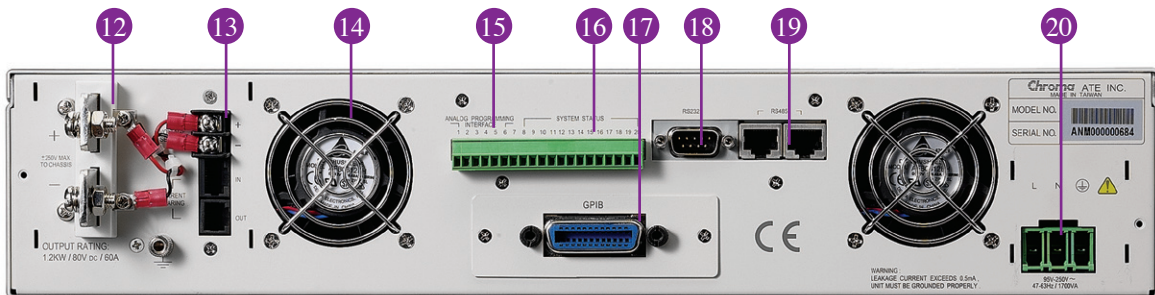

Model : 62012P-80-60

12. OUTPUT Terminal	Connect the output cable to a UUT
13. Sense Terminal	Connect the UUT for voltage compensation
14. System Fan	
15. Analog programming interface	For analog level to program and monitor output voltage & current
16. System I/O port	Send 8 bit TTL, DC-ON, fault output signal and remote inhibit and trigger input signal
17. GPIB Connector(Optional)	
18. RS-232 Connector	
19. RS-485 Connector	For master/slave control
20. AC Input Terminal	

Model	62006P-100-25	62006P-300-8	62012P-80-60	62012P-100-50	62012P-600-8	62024P-80-60	62024P-100-50	62050P-100-100
Output Ratings								
Output Voltage	0~100V	0~300V	0~80V	0~100V	0~600V	0~80V	0~100V	0~100V
Output Current	0~25A	0~8A	0~60A	0~50A	0~8A	0~60A	0~50A	0~100A
Output Power	600W	600W	1200W	1200W	1200W	2400W	2400W	5000W
Line Regulation								
Voltage	0.01%+6mV	0.01%+18mV	0.01%+8mV	0.01%+10mV	0.01%+18mV	0.01%+8mV	0.01%+10mV	0.01%+10mV
Current	0.01%+5mA	0.03%+20mA	0.01%+10mA	0.01%+12mA	0.03%+20mA	0.01%+10mA	0.01%+12mA	0.01%+12mA
Load Regulation								
Voltage	0.01%+10mV	0.01%+50mV	0.01%+12mV	0.01%+18mV	0.01%+50mV	0.01%+12mV	0.01%+18mV	0.01%+18mV
Current	0.01%+5mA	0.03%+40mA	0.01%+20mA	0.01%+28mA	0.03%+40mA	0.01%+20mA	0.01%+28mA	0.01%+28mA
Voltage Measurement								
Range	20V/100V	60V/300V	16V/80V	20V/100V	120V/600V	16V/80V	20V/100V	20V/100V
Accuracy	0.05% + 0.05%F.S.							
Current Measurement								
Range	5A/25A	1.6A/8A	12A/60A	10A/50A	1.6A/8A	12A/60A	10A/50A	20A/100A
Accuracy	0.1% + 0.2%F.S.		0.1% + 0.1%F.S.					
Output Noise (0 ~ 20MHz)								
Voltage Ripple (P-P)	85 mV	180 mV	100 mV	100 mV	180 mV	100 mV	100 mV	125 mV
Voltage Ripple (rms)	10 mV	90 mV	10 mV	15 mV	90 mV	10 mV	15 mV	20 mV
Current Ripple (rms)	10 mA	60 mA	30 mA	20 mA	60 mA	30 mA	20 mA	30 mA
OVP Adjustment Range 110% of Vset to 110% of Vmax								
Efficiency	0.75	0.75	0.8	0.8	0.8	0.85	0.85	0.85
Drift (8 hours)								
Voltage	0.02% of Vmax							
Current	0.04% of Imax							
Temperature Coefficient								
Voltage	0.02% of Vmax/ °C							
Current	0.04% of Imax/ °C							
Transient Response Time								
3 mS	3mS	3 mS	3 mS	3mS	3mS	3mS	3mS	3mS
10 % step change	180 mV	600 mV	250 mV	250 mV	600 mV	250 mV	250 mV	250 mV
AC Input Voltage								
95 to 250Vac			190 to 250Vac (Single phase)			190 to 250Vac (Single phase)		190 to 250Vac (3phase 4 wire, Delta connection) or 342 to 440Vac (3phase 5 wire, Y connection)
Weight	13kg	13kg	13kg	13kg	13kg	13kg	13kg	25kg
Operating Temperature	0~40°C	0~40°C	0~40°C	0~40°C	0~40°C	0~40°C	0~40°C	0~40°C
Dimensions (HxWxD) mm	88 x 428 x 425	88 x 428 x 425	88 x 428 x 425	88 x 428 x 425	88 x 428 x 425	88 x 428 x 425	88 x 428 x 425	177 x 428 x 425

All specifications are subject to change without notice.

ORDERING INFORMATION

- 62006P-100-25** : Programmable DC Power Supply, 100V / 25A / 600W
- 62006P-300-8** : Programmable DC Power Supply, 300V / 8A / 600W
- 62012P-80-60** : Programmable DC Power Supply, 80V / 60A / 1200W
- 62012P-100-50** : Programmable DC Power Supply, 100V / 50A / 1200W
- 62012P-600-8** : Programmable DC Power Supply, 600V / 8A / 1200W
- 62024P-80-60** : Programmable DC Power Supply, 80V / 60A / 2400W
- 62024P-100-50** : Programmable DC Power Supply, 100V / 50A / 2400W
- 62050P-100-100** : Programmable DC Power Supply, 100V / 100A / 5000W
- A620004** : GPIB Interface for Model 62000P Series
- A620006** : Rack Mounting Kit for Model 62000P Series
- A620009** : Softpanel for 62000P Series



OTHER SPECIFICATIONS

Programming & Measurement Resolution	
Voltage (Front Panel)	10 mV
Current (Front Panel)	10 mA
Voltage (Remote Interface)	0.003% of Vmax
Current (Remote Interface)	0.002% of Imax
Voltage (Analog Programming Interface)	0.04% of Vmax
Current (Analog Programming Interface)	0.04% of Imax
Programming Accuracy	
Voltage Programming (Front Panel and Remote Interface)	0.1% of Vmax
Voltage Programming (Analog Programming Interface)	0.2% of Vmax
Current Programming (Front Panel and Remote Interface)	0.3% of Imax
Current Programming (Analog Programming Interface)	0.3% of Imax
Programming Response Time	
Rise Time: For a programmed 5% to 95% step of rated voltage. (Full Load)	10 ms
Rise Time: For a programmed 5% to 95% step of rated voltage. (No Load)	10 ms
Fall Time: For a programmed 95% to 5% step of rated voltage. (Full Load)	60 ms
Fall Time: For a programmed 95% to 5% step of rated voltage. (No Load)	840 ms (max.) / 4S for 600V models
Vout setting (GPIB send command to DC Power Supply receiver)	20 ms
?Volt, ? Current (under GPIB command using Fetch)	25 ms
?Volt, ? Current (under GPIB command using Measure)	70 ms
Analog Programming Interface	
Voltage and Current Programming inputs	0~10Vdc or 0~5Vdc of F.S.
Voltage and Current monitor	0~10Vdc or 0~5Vdc of F.S.
Isolation: Maximum working voltage of any analog programming signal with respect to chassis potential	70 Vdc
Auxiliary Power Supply	
Output Voltage	12 Vdc
Maximum current source capability	10 mA
Remote Inhibit Function	
Use to disable the output of DC Power Supply; Active Low	TTL
DC-ON Output Signal	
Indicate the output status, Active High	TTL
Fault Output Signal	
Indicate if there is a fault/protection occurred, Active Low	TTL
Series & Parallel operation function with Master / Slave control	
Voltage limit @ Series Mode. (Model 62012P-600-8)	800 Volt
Voltage limit @ Series Mode (Refer to Ground)	240 Volt
Number of DC Power Supplies allowed @ master / slave control mode	5
Auto Sequencing Programmable Function	
Number of program	10
Number of sequence	100
Time Range	5 ms ~ 15000 S
TTL signal out	8 bits
TTL source capability	7 mA
Slew Rate Control Function	
Voltage slew rate range (The fall rate will be affected by the discharge rate of the output capacitors especially under no load condition.)	0.01V ~ 10V/ms
Current slew rate range of current	0.01A ~ 1A/ms
Minimum transition time	0.5 ms
Remote Sense	
Line loss compensation	5V

All specifications are subject to change without notice.

Developed and Manufactured by :

CHROMA ATE INC.

致茂電子股份有限公司

HEADQUARTERS

66, Hwa-Ya 1st Rd., Hwa-Ya
Technology Park, Kuei-Shan Hsiang,
Taoyuan Hsien 33383, Taiwan
Tel: +886-3-327-9999
Fax: +886-3-327-8898
<http://www.chromaate.com>
E-mail: chroma@chroma.com.tw

U.S.A.

CHROMA ATE INC. (U.S.A.)
7 Chrysler Irvine, CA 92618
Tel: +1-949-421-0355
Fax: +1-949-421-0353
Toll Free: +1-800-478-2026

EUROPE

CHROMA ATE EUROPE B.V.
Morsestraat 32, 6716 AH Ede,
The Netherlands
Tel: +31-318-648282
Fax: +31-318-648288

CHINA

CHROMA ELECTRONICS
(SHENZHEN) CO., LTD.
8F, No.4, Nanyou Tian An
Industrial Estate, Shenzhen,
China PC: 518054
Tel: +86-755-2664-4598
Fax: +86-755-2641-9620

Distributed by:

Worldwide Distribution and Service Network
62000P-200711-PDF