



160 School House Road, Souderton, PA 18964-9990 USA
Phone 215-723-8181 • FAX 215-723-5688


MODEL 25S1G4A
M1, M2, M3, M4
25 WATTS CW
0.8 – 4.2 GHz

The Model 25S1G4A is a solid state, self-contained, air-cooled, broadband amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. Housed in a stylish contemporary cabinet, the unit is designed for benchtop use, but can be removed from the cabinet for immediate equipment rack mounting.

The 25S1G4A, when used with a sweep generator, will provide a minimum of 25 watts of RF power. Included is a front panel gain control which permits the operator to conveniently set the desired output level. The 25S1G4A is protected from RF input overdrive by an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF amplifier stages are protected from over-temperature by removing the DC voltage to them if an over-temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions if an over-temperature or power supply fault has occurred. The unit can be returned to operate when the condition has been cleared. The 25S1G4A digital panel provides control of all amplifier functions both locally and remotely via IEEE-488 (GPIB) or RS-232 interfaces.

The low level of spurious signals and linearity of the Model 25S1G4A make it ideal for use as a driver amplifier in testing wireless and communication components and subsystems. It can be used as a test instrument covering multiple frequency bands and is suitable for a variety of communication technologies such as CDMA, W-CDMA, TDMA, GSM etc. It is also suitable for EMC Test applications where undistorted modulation envelopes are desired.

25S1G4A
Typical Performance

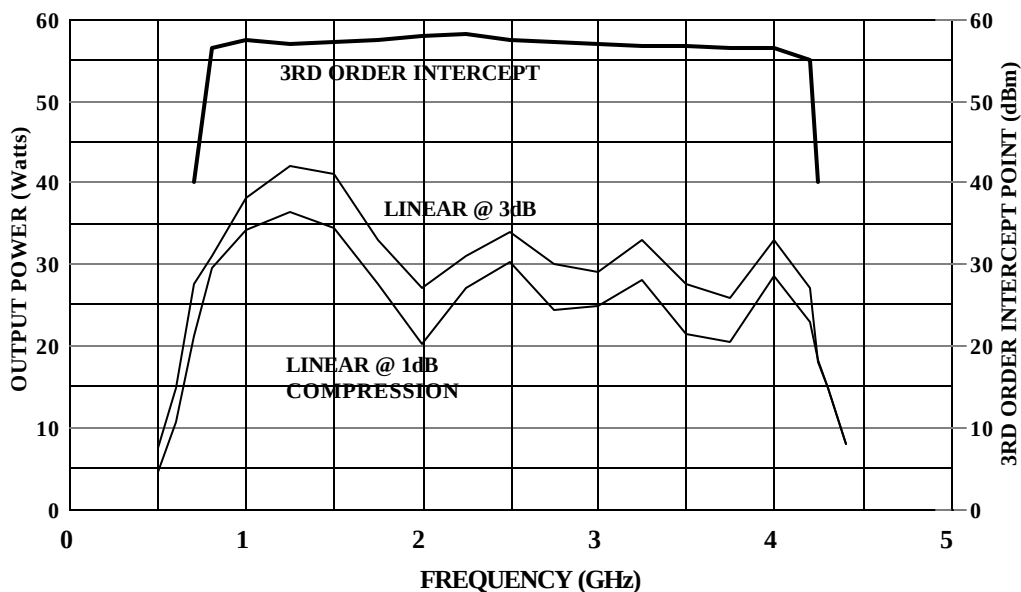

SPECIFICATIONS
Model 25S1G4A

RATED POWER OUTPUT 25 WATTS MINIMUM

**INPUT FOR RATED OUTPUT 1.0 MILLIWATT
MAXIMUM**

POWER OUTPUT @ 3dB COMPRESSSION

Nominal 32 watts

Minimum 25 watts

POWER OUTPUT @ 1dB COMPRESSION

Nominal 27 watts

Minimum 20 watts

**FLATNESS ±1.5 dB typical
..... ±2.0 dB maximum**

**FREQUENCY RESPONSE 0.8 – 4.2 GHz
..... instantaneously**

GAIN (at maximum setting) 44 dB minimum

**GAIN ADJUSTMENT.....(Continuous Range)
..... 10 dB minimum
..... (4096 steps remote)**

**INPUT IMPEDANCE 50 ohms
..... VSWR 2.0:1 maximum**

OUTPUT IMPEDANCE 50 ohms, nominal

MISMATCH TOLERANCE

100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. (See Application Note #27)

MODULATION CAPABILITY

Will faithfully reproduce AM, FM, or pulse Modulation appearing on the input signal

THIRD ORDER INTERCEPT

See chart. The third order intercept points for this chart have been determined using two tones spaced 1 MHz apart. This is typical for W-CDMA systems. Closer tone spacing such as 60 kHz generally provides about a 1db to 3db improvement in the IP.

**HARMONIC DISTORTIONMinus 20 dbc
.....max at 20 watts**

SPURIOUSMinus 73 dbc Typ.

PHASE LINEARITY ± 1.0 deg/100 MHz, Typ

**PRIMARY POWER.....(Selected Automatically)
.....90-132, 180-264 VAC
.....50/60 Hz, single phase
.....340 watts maximum**

CONNECTORS

RF Type N female

REMOTE INTERFACES

IEEE-48824 pin female

RS-232.....9 pin Subminiature D (female)

SAFETY INTERLOCK 15 pin Subminiature D

COOLING Forced air (self contained fans)

MODEL CONFIGURATIONS

MODEL NUMBER	RF INPUT	RF OUTPUT	WEIGHT	SIZE (W x H x D)
25S1G4A	Type N female on front panel	Type N female on front panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
25S1G4AM1	Type N female on rear panel	Type N female on rear panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
25S1G4AM2	Same as 25S1G4A with enclosure removed for rack mounting		25.6 kg (57.0 lb)	48.3 x 17.8 x 54.6 cm 19.0 x 7.0 x 21.5 in
25S1G4AM3	Same as 25S1G4AM1 with enclosure removed for rack mounting		25.6 kg (57.0 lb)	48.3 x 17.8 x 54.6 cm 19.0 x 7.0 x 21.5 in
25S1G4AM4	Type N female on front panel	4 SMA females on rear panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
	Single RF input, Four independent RF outputs with Rated Power out of 6 watts each.			

