
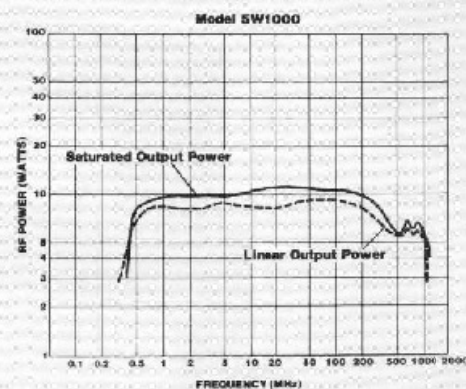


Specifications



	1W1000	5W1000
Power output, cw up to minimum	2 watts 1 watt	9 watts 5 watts
Power output, cw linear (less than 1 dB compression into 50 ohms)	1 watt minimum	5 watts minimum
Flatness	± 1.0 dB maximum; ± 0.5 dB typical	± 1.5 dB maximum; ± 1.0 dB typical
Frequency response	100 kHz to 1000 MHz	500 kHz to 1000 MHz
Input for rated output	1.0 milliwatt max.	1.0 milliwatt max.
Power gain	30 dB minimum	37 dB minimum
Input impedance	50 ohms; VSWR 2.0:1 max.	50 ohms; VSWR 2.0:1 max.
Output impedance	50 ohms; VSWR 2.5:1 max.	50 ohms nominal
Mismatch tolerance	100%	100%
(ability to operate without damage, foldback, or oscillation with any magnitude and phase of source and load impedance)		
Modulation capability	100%	100%
(ability to reproduce faithfully AM, FM, or pulse modulation appearing on input signal)		
Noise Figure	8 dB typical	10 dB typical
Harmonic distortion	Minus 20 dBc max. at 1 watt.	Minus 20 dBc max. at 5 watts.
Third-order intercept point	42 dBm typical	48 dBm typical
Primary power	100/110/120/200/208/220/ 240 Vac $\pm 5\%$, 50/60 Hz, single-phase, 50 W max.	100/110/120/200/208/220/ 240 Vac $\pm 5\%$, 50/60 Hz, single-phase, 110 W max.
(select via internal taps)		
RF Connectors	Type N female	Type N female
Cooling	Forced air (self-contained fans)	Forced air (self-contained fans)
Weight	4.1 kg (9.0 lb)	9.1 kg (20.0 lb)

Typical Power Curves

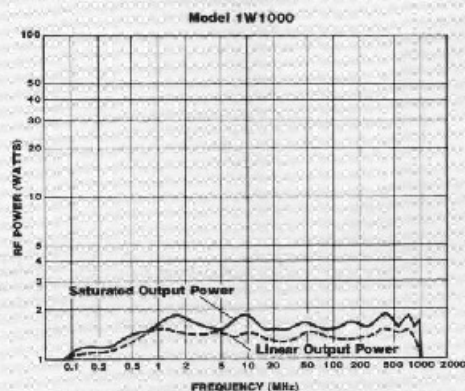

Dimensions

Models 1W1000 and 5W1000 are available as OEM rf circuit modules without power supply. Contact Amplifier Research for further information.



10W1000

22 watts
10 watts

10 watts minimum

± 1.5 dB maximum;
 ± 1.0 dB typical

1 to 1000 MHz

1.0 milliwatt max.

40 dB minimum

50 ohms; VSWR 2.0:1 max.

50 ohms nominal

100%

100%

noise floor data on request

Minus 20 dBc max. at 10 watts



50 dBm typical

100/110/120/200/208/220/
240 Vac $\pm 5\%$, 50/60 Hz,
single-phase, 400 W max.

Type N female

Forced air (self-contained fans)

28.4 kg (63.0 lb)

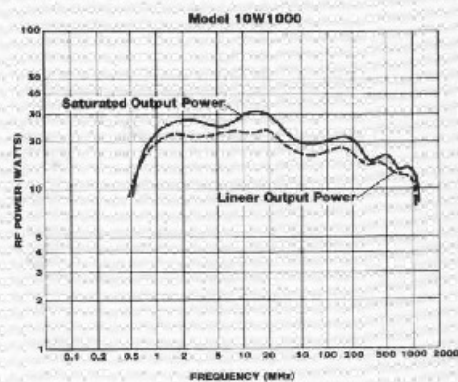

50W1000

100 watts
50 watts

40 watts minimum

± 2.0 dB maximum;
 ± 1.5 dB typical

1 to 1000 MHz

1.0 milliwatt max.

47 dB minimum

50 ohms; VSWR 2.0:1 max.

50 ohms nominal

100%

100%

noise floor data on request

Minus 20 dBc max. at 40 watts



58 dBm typical

100/110/120/200/208/220/
240 Vac $\pm 5\%$, 50/60 Hz,
single-phase, 1900 W max.

Type N female

Forced air (self-contained fans)

98.0 kg (215.0 lb)

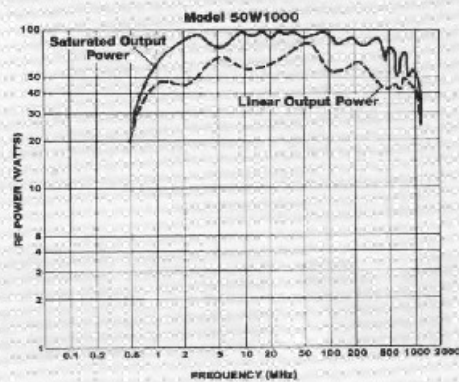

10W1000M7

15 watts
10 watts

8 watts minimum

± 1.5 dB maximum;
 ± 1.0 dB typical

100 to 1000 MHz

1.0 milliwatt max.

40 dB minimum

50 ohms; VSWR 2.0:1 max.

50 ohms nominal

100%

100%

noise floor data on request

Minus 20 dBc max. at 8 watts



49 dBm typical

100/110/120/200/208/220/
240 Vac $\pm 5\%$, 50/60 Hz,
single-phase, 150 W max.

Type N female

Forced air (self-contained fans)

9.1 kg (20 lb)

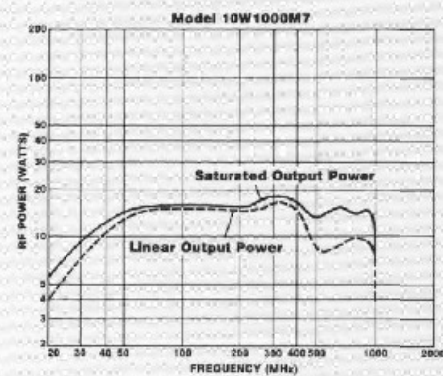

25W1000M7	100W1000M7	
40 watts 25 watts	180 watts 100 watts	Power output, cw up to minimum
20 watts minimum	70 watts minimum	Power output, cw, linear (less than 1 dB compression into 50 ohms)
± 1.5 dB maximum; ± 1.0 dB typical	± 2.0 dB maximum; ± 1.5 dB typical	Flatness
100 to 1000 MHz	100 to 1000 MHz	Frequency response (instantaneous)
1.0 milliwatt max.	1.0 milliwatt max.	Input for rated output
45 dB minimum	50 dB minimum	Power gain
50 ohms; VSWR 2.0:1 max.	50 ohms; VSWR 2.0:1 max.	Input impedance
50 ohms nominal	50 ohms nominal	Output impedance
100%	100%	Mismatch tolerance (ability to operate without damage, foldback, or oscillation with any magnitude and phase of source and load impedance)
100%	100%	Modulation capability (ability to reproduce faithfully AM, FM, or pulse modulation appearing on input signal)
noise floor data on request	noise floor data on request	Noise Figure
Minus 20 dBc max. at 20 watts	Minus 20 dBc max. at 70 watts	Harmonic distortion
52 dBm typical	60 dBm typical	Third-order intercept point
100/110/120/200/208/220/ 240 Vac $\pm 5\%$, 50/60 Hz, single-phase, 750 W max.	100/110/120/200/208/220/ 240 Vac $\pm 5\%$, 50/60 Hz, single-phase, 3000 W max.	Primary power (select via internal taps)
Type N female	Type N female	RF Connectors
Forced air (self-contained fans)	Forced air (self-contained fans)	Cooling
28.4 kg (63.0 lb)	98.0 kg (215.0 lb)	Weight
		Typical Power Curves
		Dimensions
Models 1W1000 and 5W1000 are available as OEM rf circuit modules without power supply. Contact Amplifier Research for further information.		
Specifications subject to change without notice		

1 watt to 100 watts. 100 kHz to 1 GHz.

The Amplifier Research "W" Series constitutes a complete family of self-contained ultra-broadband solid-state amplifiers providing linear operation over the spectrum from 100 kHz to 1000 MHz. The amplifiers are conservatively rated at 1, 5, 10, 25, 50, and 100 watts, and feature instantaneous bandwidth, flat output, and immunity to even worstcase load mismatch including shorted or open cable without damage or system shutdown.

Applications

- ☐ Sweep, cw, and pulse rf and emi susceptibility testing without bandswitching or tuning
- ☐ Antenna and component testing, and equipment calibration
- ☐ General laboratory instrumentation

