

## 40S6G18B

- M2-M5
- 40 Watts CW
- 6GHz-18GHz

#### **Features**

The Model 40S6G18B is a portable, self-contained, air-cooled, broadband, completely solid-state amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. The Model 40S6G18B, when used with a sweep generator, will provide a minimum of 40 watts of RF power instantaneously from 6 to 18 GHz.


The Model 40S6G18B is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a graphic Liquid Crystal Display, menu assigned softkeys, a single rotary knob, and a dedicated power on/off switch to offer extensive control and status reporting capability. The display provides gain setting and reports of internal amplifier status. Special features include a gain control and input overdrive protection.

All amplifier control functions and status indications are available remotely in GPIB/IEEE-

488 format, RS-232 hardwire and fiber optic, USB, and Ethernet. The buss interface connector is located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

The Model 40S6G18B is designed to have low spurious signals, linearity and is extremely load tolerant which enables it to be used in many RF applications such as: RF susceptibility testing, antenna/component testing, and communication technology testing. It can be used as a test instrument covering multiple frequency bands and is suitable for a variety of communication technologies such as CDMA, W-CDMA, TDMA, GSM, UWB, WiMAX etc.

The export classification for this equipment is 3A001. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

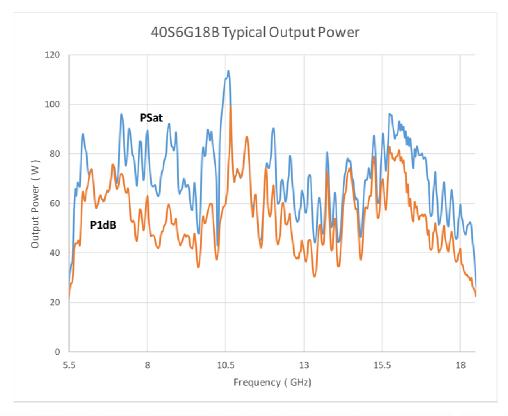

AR RF/Microwave Instrumentation 160 School House Rd Souderton, PA 18964 215-723-8181

For an applications engineer call:800.933.8181

www.arworld.us



#### Page 2

### 40S6G18B

- M2-M5
- 40 Watts CW
- 6GHz-18GHz

# Specifications

RATED POWER OUTPUT: 40 watts minimum

POWER OUTPUT @ 3dB COMPRESSION: Nominal, 46 watts; Minimum, 35 watts

POWER OUTPUT @ 1dB COMPRESSION:

Nominal, 30 watts; Minimum, 22 watts

**POWER GAIN FLATNESS:**  $\pm 2.0 \text{ dB typical}$ ;  $\pm 3.0 \text{ dB}$ 

Haxiiiioiii

FREQUENCY RESPONSE: 6–18 GHz instantaneously

INPUT FOR RATED OUTPUT: 1.0 milliwatt maximum,

0 dBm

GAIN (at maximum setting): 46 dB minimum

GAIN ADJUSTMENT (Continuous Range): 10 dB mini-

mun

INPUT IMPEDANCE: 50 ohms, VSWR 2.5:1 maximum

**OUTPUT IMPEDANCE:** 50 ohms, nominal

**MISMATCH TOLERANCE:** 100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. See Application Note 27.

**MODULATION CAPABILITY:** Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal

HARMONIC DISTORTION: Minus 20 dBc maximum at

40 watts

THIRD ORDER INTERCEPT POINT: 52 dBm typical

PRIMARY POWER (selected automatically):

90-132, 180-264 VAC; 50/60 Hz, single phase;

<1000 watts maximum

**CONNECTORS:** 

RF INPUT & OUTPUT: See Model Configurations

**REMOTE INTERFACES:** 

IEEE-488 24 pin female

RS-232 9 pin Subminiature D (female)

RS-232 (Fiber-optic) Type ST USB 2.0 Type B Ethernet RJ-45

SAFETY INTERLOCK: 15 Pin Subminiature D
COOLING: Forced air (self contained fans)
SIZE/WEIGHT: See Model Configurations

**EXPORT CLASSIFICATION: 3A001** 

#### **Model Configurations**

MODEL	RF INPUT CONNECTOR	RF OUTPUT CONNECTOR	WEIGHT	SIZE (W x H x D)
40S6G18B	Precision N female, rear	Precision N female, rear	45 kg,	50.3 x 29.5 x 54.6 cm
10010100110			99 lb	19.8 x 11.6 x 21.5 in
40S6G18BM2	Precision N female, front	Precision N female, rear	45 kg,	50.3 x 29.5 x 54.6 cm
			99 lb	19.8 x 11.6 x 21.5 in
40\$6G18BM5	Same as 40S6G18B but with enclosure removed for		35 kg,	48.3 x 26.67 x 54.6 cm
	rack mounting.		77 lb	19.8 x 10.5 x 21.5 in