

Keysight Technologies

U2300A Series USB Modular Multifunction Data Acquisition Devices

Data Sheet





Introduction

The Keysight Technologies, Inc. U2300A Series USB Modular Multifunction Data Acquisition (DAQ) devices offer a high-performance PC data-acquisition solution. The U2300A Series DAQ devices consist of two families: the basic multifunction DAQ comes in four models while the high density multifunction DAQ is made up of three models. The U2300A Series DAQ devices applications extend across industrial and education environments. Extending across industrial and education environments, the U2300A series DAQ with fast sampling rates is well suited for research and development, manufacturing as well as design validation designers.

Features

- Up to 3 MSa/s sampling rate for a single channel
- Functions as a standalone or modular unit
- Easy to use: Plug-and-play and hot swappable with Hi-Speed USB 2.0
- Up to 384 channels when incorporated into U2781A modular product chassis
- Easy-to-use bundled software for quick setup and data logging to PC
- 12-bit or 16-bit analog-to-digital (A/D) resolution
- 24-bit programmable digital input/output
- Self-calibration capability
- Compatible with a wide range of Keysight Development Environments (KDEs)
- USB 2.0 and USBTMC-USB488 standards

High sampling rate

The U2300A Series DAQ devices can generate sampling rates of up to 3 MSa/s for a single channel. When multiple channels are configured, the device can sample data up to 1 MSa/s. The fast sampling capability allows users to perform intermittent detection easily. This is ideal when dealing with high density analog input/output signals especially when juggling between different input ranges and sampling requirements.

Flexible standalone or modular capability

The U2300A Series DAQ devices are uniquely designed with the flexibility to function as a standalone unit or as a part of a modular unit. When used together with the U2781A modular product chassis, the devices has the capability to support up to 384 channels.

Flexible system and control options with polling and continuous mode

The U2300A Series DAQ devices have two modes, polling mode and continuous mode. Selecting continuous mode enables you to acquire data continuously once the trigger signal is received.

Arbitrary waveform

Designed to support arbitrary waveforms, the U2300A Series allows you to generate arbitrary waveform via the Keysight Measurement Manager application software or SCPI commands.

Burst mode

Equipped with the burst mode, the enhancement feature enables simultaneous mode for analog input acquisition. Now you can perform sampling measurement up to the highest possible speed of the DAQ.

Trigger sources

U2300A Series offers various trigger options from immediate trigger (none), analog/external digital trigger, System Synchronous Interface (SSI)/ Star trigger and Master/Slave trigger sources. These entire trigger options has the capability to configure trigger sources during A/D and digital-to-analog (D/A) operations. Selecting the slave trigger and SSI/Star trigger are recommended when the USB modules are used together with the U2781A USB modular product chassis.

Predefined function generator

Aside from supplying DC voltage, the two analog output channels are capable of generating common and predefined waveforms such as sinusoidal wave, square wave, triangle wave, sawtooth wave and noise wave.

Product outlook and dimensions


Front view



Rear view



Top view

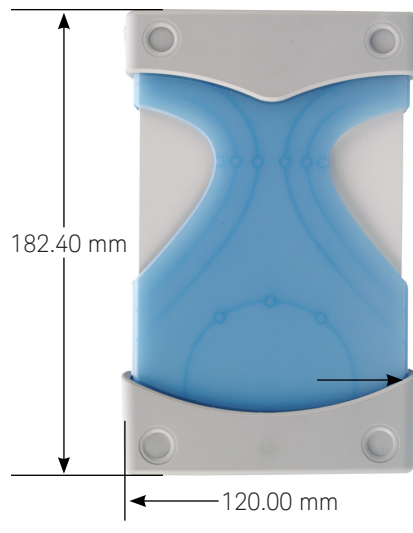

Standard shipped accessories

- AC/DC Power adapter
- Power cord
- USB extension cable
- L-Mount kit (used with modular product chassis)
- Keysight USB Modular Products Quick Start Guide
- Keysight USB Modular Products Reference CD-ROM
- Keysight Automation-Ready CD-ROM (contains the Keysight IO Libraries Suite)
- Certificate of Calibration

Optional accessories

- U2901A Terminal block and SCSI-II 68-pin connector with 1-meter cable
- U2902A Terminal block and SCSI-II 68-pin connector with 2-meter cable

Product characteristics and general specifications

Remote interface

- Hi-Speed USB 2.0
- USBTMC-USB488¹

Power requirement

- +12 VDC (TYPICAL)
- 2 A (MAX) input rated current

Power consumption

+12 VDC, 550 mA maximum

Operating environment

- Operating temperature from 0 °C to +55 °C
- Relative humidity at 15% to 85% RH (non-condensing)
- Altitude up to 2000 meters
- Pollution Degree 2
- For indoor use only

Storage compliance

-20 °C to 70 °C

Safety compliance

Certified with:

- IEC 61010-1:2001/EN 61010-1:2001 (2nd Edition)
- USA: UL61010-1: 2004
- Canada: CSA C22.2 No.61010-1:2004

EMC compliance

- IEC/EN 61326-1 1998
- CISPR 11: 1990/EN55011:1991, Class A, Group 1
- Canada: ICES-001: 1998
- Australia/New Zealand: AS/NZS 2064.1

Shock and vibration

Tested to IEC/EN 60068-2

IO connector

68-pin female VHDCI Type

Dimension (W × D × H)

Module dimension:

- 120.00 mm × 182.40 mm × 44.00 mm (with plastic casing)
- 105.00 mm × 174.54 mm × 25.00 mm (without plastic casing)

Terminal block dimension:

- 103.00 mm × 85.20 mm × 42.96 mm

Weight

- 565 g (with plastic casing)
- 400 g (without plastic casing)

Warranty

Three years for U2300A series DAQ devices
Three months for standard shipped accessories

1. Compatible with Microsoft Windows operating systems only. Requires a direct USB connection to the PC so the appropriate driver can be installed in the USB DAQ module.

Electrical Specifications

Basic multifunction USB DAQ

| Model number | U2351A | U2352A | U2353A | U2354A |
|---------------------------------------|---|--------|---|--------|
| Analog input | | | | |
| Resolution | 16 bits, no missing codes | | | |
| Number of channels | 16 SE/8 DI (software selectable/channel) | | | |
| Maximum sampling rate ¹ | 250 kSa/s | | 500 kSa/s | |
| Scan list memory | Up to 100 selectable channel entries | | | |
| Programmable bipolar input range | ± 10 V, ± 5 V, ± 2.5 V, ± 1.25 V | | | |
| Programmable unipolar input range | 0 to 10 V, 0 to 5 V, 0 to 2.5 V, 0 to 1.25 V | | | |
| Input coupling | DC | | | |
| Input impedance | 1 G Ω / 100 pF | | | |
| Operational common mode voltage range | ± 7.5 V _{maximum} | | | |
| Overvoltage protection | Power-on: Continuous ± 30 V, Power-off: Continuous ± 15 V | | | |
| Trigger sources | External analog/digital trigger, SSI/Star trigger ² | | | |
| Trigger modes | Pre-trigger, delay-trigger, post-trigger, and middle-trigger | | | |
| FIFO buffer size | Up to 8 MSa | | | |
| Analog output | | | | |
| Resolution | 16 bits | - | 16 bits | - |
| Number of channels | 2 | - | 2 | - |
| Maximum update rate | 1 MSa/s | - | 1 MSa/s | - |
| Output ranges | 0 to 10 V, ± 10 V, 0 to AO_EXT_REF, \pm AO_EXT_REF ³ | - | 0 to 10 V, ± 10 V, 0 to AO_EXT_REF, \pm AO_EXT_REF ³ | - |
| Output coupling | DC | - | DC | - |
| Output impedance | 0.1 Ω typical | - | 0.1 Ω typical | - |
| Stability | Any passive load up to 1500 pF | - | Any passive load up to 1500 pF | - |
| Power-on state | 0 V steady state | - | 0 V steady state | - |
| Trigger sources | External analog/digital trigger, SSI/Star trigger ² | - | External analog/digital trigger, SSI/Star trigger ² | - |
| Trigger modes | Post-trigger and delay-trigger | - | Post-trigger and delay-trigger | - |
| FIFO buffer size | One channel: Maximum 8 MSa Two channels: Maximum 4 MSa/ch | - | One channel: Maximum 8 MSa Two channels: Maximum 4 MSa/ch | - |
| Function generation mode | Sine, square, triangle, sawtooth, and noise waveforms | - | Sine, square, triangle, sawtooth, and noise waveforms | - |

Basic multifunction USB DAQ (continued)

| | |
|--|--|
| Digital I/O | |
| Number of channels | 24-bit programmable input/output |
| Compatibility | TTL |
| Input voltage | $V_{IL} = 0.7 \text{ V max}$, $I_{IL} = 10 \text{ } \mu\text{A max}$ $V_{IH} = 2.0 \text{ V min}$, $I_{IH} = 10 \text{ } \mu\text{A max}$ |
| Input voltage range | -0.5 V to +5.5 V |
| Output voltage | $V_{OL} = 0.45 \text{ V max}$, $I_{OL} = 8 \text{ mA max}$ $V_{OH} = 2.4 \text{ V min}$, $I_{OH} = 400 \text{ } \mu\text{A max}$ |
| General purpose digital counter | |
| Maximum count | $(2^{31}-1)$ bits |
| Number of channels | Two independent up/down counter |
| Compatibility | TTL |
| Clock source | Internal or external |
| Base clock available | 48 MHz |
| Maximum clock source frequency | 12 MHz |
| Input frequency range ⁴ | 0.1 Hz to 6 MHz at 50% duty cycle |
| Pulse width measurement range | 0.167 μs to 178.956 s |
| Analog trigger | |
| Trigger source | All analog input channels, External analog trigger (EXTA_TRIG) |
| Trigger level | \pm Full scale for internal; $\pm 10 \text{ V}$ for external |
| Trigger conditions | Above high, below low, and window (software selectable) |
| Trigger level resolution | 8 bits |
| Bandwidth | 400 kHz |
| Input impedance for EXTA_TRIG | 20 k Ω |
| Coupling | DC |
| Overvoltage protection | Continuous for $\pm 35 \text{ V}_{\text{maximum}}$ |
| Digital trigger | |
| Compatibility | TTL/CMOS |
| Response | Rising or falling edge |
| Pulse width | 20 ns _{minimum} |
| Calibration⁵ | |
| On board reference voltage | 5 V |
| Temperature drift | $\pm 2 \text{ ppm}/^\circ\text{C}$ |
| Stability | $\pm 6 \text{ ppm}/1000 \text{ hrs}$ |
| General | |
| Remote interface | Hi-Speed USB 2.0 |
| Device class | USBTMC-USB488 |
| Programmable interface | Standard Commands for Programmable Instruments (SCPI) and IVI-COM |

1. When multiple channels are used, the sampling rate of each channel is the maximum sampling rate divided by the number of channels used.
2. System Synchronous Interface (SSI) and Star trigger commands are used when modular devices are used in the product chassis.
3. Maximum external reference voltage for analog output channels (AO_EXT_REF) is $\pm 10 \text{ V}$.
4. Measurement frequency's resolution:
= 12 MHz/n, n = 2, 3, 4, 5, ..., 120 M
= 6 MHz, 4 MHz, 3 MHz, 2.4 MHz, 2.0 MHz, ..., 0.1 Hz (up to six decimal points)
5. 20 minutes warm-up time is recommended.

High density multifunction USB DAQ

| Model number | U2355A | U2356A | U2331A |
|---------------------------------------|--|-----------|---|
| Analog input | | | |
| Resolution | 16 bits, no missing codes | | 12 bits, no missing codes |
| Number of channels | 64 SE/32 DI (software selectable/channel) | | |
| Maximum sampling rate ¹ | 250 kSa/s | 500 kSa/s | 3 MSa/s (single channel) 1 MSa/s (multiple channels) |
| Scan list memory | Up to 100 selectable channel entries | | |
| Programmable bipolar input range | ±10 V, ±5 V, ±2.5 V, ±1.25 V | | ±10 V, ±5 V, ±2.5 V, ±1.25 V, ±1 V, ±0.5 V, ±0.25 V, ±0.2 V, ±0.05 V |
| Programmable unipolar input range | 0 to 10 V, 0 to 5 V, 0 to 2.5 V, 0 to 1.25 V | | 0 to 10 V, 0 to 5 V, 0 to 4 V, 0 to 2.5 V, 0 to 2 V, 0 to 1 V, 0 to 0.5 V, 0 to 0.4 V, 0 to 0.1 V |
| Input coupling | DC | | |
| Input impedance | 1 GΩ / 100 pF | | |
| Operational common mode voltage range | ±7.5 V maximum | | |
| Overvoltage protection | Power-on: Continuous ±30 V, Power-off: Continuous ±15 V | | |
| Trigger sources | External analog/digital trigger, SSI/Star trigger ² | | |
| Trigger modes | Pre- trigger, delay-trigger, post-trigger, and middle-trigger | | |
| FIFO buffer size | Up to 8 MSa | | |
| Analog output | | | |
| Resolution | 12 bits | | |
| Number of channels | 2 | | |
| Maximum update rate | 1 MSa/s | | |
| Output ranges | 0 to 10 V, ±10 V, 0 to AO_EXT_REF, ±AO_EXT_REF ³ | | |
| Output coupling | DC | | |
| Output impedance | 0.1 Ω Typical | | |
| Stability | Any passive load up to 1500 pF | | |
| Power-on state | 0 V steady state | | |
| Trigger sources | External analog/digital trigger, SSI/Star trigger ² | | |
| Trigger modes | Post-trigger and delay-trigger | | |
| FIFO buffer size | One channel: Maximum 8 MSa Two channels: Maximum 4 MSa/ch | | |
| Function generation mode | Sine, square, triangle, sawtooth, and noise waveforms | | |
| Digital I/O | | | |
| Number of bits | 24-bit programmable input/output | | |
| Compatibility | TTL | | |
| Input voltage | $V_{IL} = 0.7 \text{ V max}$, $I_{IL} = 10 \text{ } \mu\text{A max}$ $V_{IH} = 2.0 \text{ V min}$, $I_{IH} = 10 \text{ } \mu\text{A max}$ | | |
| Input voltage range | -0.5 V to +5.5 V | | |
| Output voltage | $V_{OL} = 0.45 \text{ V max}$, $I_{OL} = 8 \text{ mA max}$ $V_{OH} = 2.4 \text{ V min}$, $I_{OH} = 400 \text{ } \mu\text{A max}$ | | |

High density multifunction USB DAQ (*continued*)

| General purpose digital counter | |
|--|---|
| Maximum count | $(2^{31} - 1)$ bits |
| Number of channels | Two independent up/down counter |
| Compatibility | TTL |
| Clock source | Internal or external |
| Base clock available | 48 MHz |
| Maximum clock source frequency | 12 MHz |
| Input frequency range ⁴ | 0.1 Hz to 6 MHz at 50% duty cycle |
| Pulse width measurement range | 0.167 μ s to 178.956 s |
| Analog trigger | |
| Trigger source | All analog input channels, External analog trigger (EXTA_TRIG) |
| Trigger level | \pm Full scale for internal; \pm 10 V for external |
| Trigger conditions | Above high, below low, and window (software selectable) |
| Trigger level resolution | 8 bits |
| Bandwidth | 400 kHz |
| Input impedance for EXTA_TRIG | 20 k Ω |
| Coupling | DC |
| Overvoltage protection | Continuous for $\pm 35 V_{\text{maximum}}$ |
| Digital trigger | |
| Compatibility | TTL/CMOS |
| Response | Rising or falling edge |
| Pulse width | 20 ns minimum |
| Calibration⁵ | |
| On board reference | 5 V |
| Temperature drift | ± 2 ppm/ $^{\circ}$ C |
| Stability | ± 6 ppm/1000 hrs |
| General | |
| Remote interface | Hi-Speed USB 2.0 |
| Device class | USBTMC-USB488 |
| Programmable interface | Standard Commands for Programmable Instruments (SCPI) and IVI-COM |

1. When multiple channels are used in the U2355A or U2356A, the sampling rate of each channel is the maximum sampling rate divided by the number of channels used. For multiple channels used in the U2331A, the sampling rate of each channel = (1 MSa/s) / number of channels used.
2. System Synchronous Interface (SSI) and Star trigger commands are used when modular devices are used in the product chassis.
3. Maximum external reference voltage for analog output channels (AO_EXT_REF) is ± 10 V.
4. Measurement frequency's resolution:
= 12 MHz/n, n = 2, 3, 4, 5, ..., 120 M
= 6 MHz, 4 MHz, 3 MHz, 2.4 MHz, 2.0 MHz, ..., 0.1 Hz (up to six decimal points)
5. 20 minutes warm-up time is recommended.

Electrical measurement specifications

Basic multifunction USB DAQ

| Model number | U2351A, U2352A | | U2353A, U2354A | |
|---|-------------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Analog input measurement¹ | | | | |
| Function | 23 °C ± 5 °C | 0 °C to 18 °C 28 °C to 45 °C | 23 °C ± 5 °C | 0 °C to 18 °C 28 °C to 45 °C |
| Offset error | ±1 mV | ±5 mV | ±1 mV | ±5 mV |
| Gain error | ±2 mV | ±5 mV | ±2 mV | ±5 mV |
| -3 dB Small signal bandwidth ² | 760 kHz | | 1.5 MHz | |
| 1% THD Large signal bandwidth ² | 300 kHz | | 300 kHz | |
| System noise | 1 mVrms | 2 mVrms | 1 mVrms | 2.5 mVrms |
| CMRR | 62 dB | | 62 dB | |
| Spurious-Free Dynamic Range (SFDR) ³ | 88 dB | | 82 dB | |
| Signal-to-Noise and Distortion Ratio (SINAD) ³ | 80 dB | | 78 dB | |
| Total Harmonic Distortion (THD) ³ | -90 dB | | -82 dB | |
| Signal-to-Noise Ratio (SNR) ³ | 80 dB | | 78 dB | |
| Effective Number of Bits (ENOB) ³ | 13 | | 12.6 | |
| Model number | U2351A, U2353A | | | |
| Analog output measurement¹ | | | | |
| Function | 23 °C ± 5 °C | | 0 °C to 18 °C 28 °C to 45 °C | |
| Offset error | ±1 mV | | ±4 mV | |
| Gain error | ±4mV | | ±5 mV | |
| Slew rate | 19 V/μs | | | |
| Rise time | 0.9 μs | | | |
| Fall time | 0.9 μs | | | |
| Settling time to 1% output error | 4 μs | | | |
| Driving capability | 5 mA | | | |
| Glitch energy | 5 ns-V (Typical), 80 ns-V (Maximum) | | | |

1. Specifications are for 20 minutes of warm-up time, calibration temperature at 23 °C and input range of ±10 V.

2. Specifications are based on the following test condition:

| Bandwidth test | Model number | Test conditions (DUT setting at ±10 V bipolar) | |
|-------------------------------|--------------|--|----------------|
| -3 dB Small signal bandwidth | U2351A | Sampling rate: | 250 kSa/s |
| 1% THD large signal bandwidth | U2352A | Input voltage: | |
| | | - -3 dB Small signal bandwidth | - 10% FSR |
| | | - 1% THD Large signal bandwidth | - FSR -1 dB FS |
| | U2353A | Sampling rate: | 500 kSa/s |
| | U2354A | Input voltage: | |
| | | - -3 dB Small signal bandwidth | - 10% FSR |
| | | - 1% THD Large signal bandwidth | - FSR -1 dB FS |

3. Specifications are based on the following test conditions:

| Dynamic range test | Model number | Test conditions (DUT setting at ±10 V bipolar) | |
|-----------------------------|--------------|--|--------------|
| SFDR, THD, SINAD, SNR, ENOB | U2351A | - Sampling rate: | 250 kSa/s |
| | U2352A | - Fundamental frequency: | 2.4109 kHz |
| | | - Number of points: | 8192 |
| | | - Fundamental input voltage: | FSR -1 dB FS |
| | U2353A | - Sampling rate: | 500 kSa/s |
| | U2354A | - Fundamental frequency: | 4.974 kHz |
| | | - Number of points: | 16384 |
| | | - Fundamental input voltage: | FSR -1 dB FS |

High density multifunction USB DAQ

| Model number | U2355A | | U2356A | | U2331A | |
|---|--------------|---------------------------------|--------------|---------------------------------|--------------|---------------------------------|
| Analog input measurement ¹ | | | | | | |
| Function | 23 °C ± 5 °C | 0 °C to 18 °C 28 °C to 45 °C | 23 °C ± 5 °C | 0 °C to 18 °C 28 °C to 45 °C | 23 °C ± 5 °C | 0 °C to 18 °C 28 °C to 45 °C |
| Offset error | ±1 mV | ±2 mV | ±1 mV | ±2 mV | ±2 mV | ±3 mV |
| Gain error | ±2 mV | ±3 mV | ±2 mV | ±6 mV | ±6 mV | ±7.5 mV |
| -3 dB small signal bandwidth ² | 760 kHz | | 1.3 MHz | | 1.2 MHz | |
| 1% THD large signal bandwidth ² | 400 kHz | | 400 kHz | | N/A | |
| System noise | 1 mVrms | 2 mVrms | 1 mVrms | 4 mVrms | 3 mVrms | 5 mVrms |
| CMRR | 64 dB | | 61 dB | | 62 dB | |
| Spurious-Free Dynamic Range (SFDR) ³ | 88 dB | | 86 dB | | 71 dB | |
| Signal-to-Noise and Distortion Ratio (SINAD) ³ | 80 dB | | 78 dB | | 72 dB | |
| Total Harmonic Distortion (THD) ³ | -90 dB | | -84 dB | | -76 dB | |
| Signal-to-Noise Ratio (SNR) ³ | 80 dB | | 78 dB | | 72 dB | |
| Effective Number of Bits (ENOB) ³ | 13 | | 12.6 | | 11.6 | |

- Specifications are for 20 minutes of warm-up time, calibration temperature at 23 °C and input range of ±10 V.
- Specifications are based on the following test conditions.

| Bandwidth test | Model number | Test conditions (DUT setting at ±10 V bipolar) |
|---|--------------|--|
| -3 dB Small signal bandwidth 1% THD Large signal bandwidth | U2355A | Sampling rate: 250 kSa/s Input voltage: - -3 dB Small signal bandwidth 10% FSR - 1% THD Large signal bandwidth FSR -1 dB FS |
| | U2356A | Sampling rate: 500 kSa/s Input voltage: - -3 dB Small signal bandwidth 10% FSR - 1% THD Large signal bandwidth FSR -1 dB FS |
| | U2331A | Sampling rate: 3 MSa/s Input voltage: - -3 dB Small signal bandwidth 10% FSR - 1% THD Large signal bandwidth FSR -1 dB FS |

- Specifications are based on the following test conditions.

| Dynamic range test | Model number | Test conditions (DUT setting at ±10 V bipolar) |
|---|--------------|--|
| -3 dB Small signal bandwidth 1% THD Large signal bandwidth | U2355A | - Sampling rate: 250 kSa/s - Fundamental frequency: 2.4109 kHz - Number of points: 8192 - Fundamental input voltage: FSR -1 dB FS |
| | U2356A | - Sampling rate: 500 kSa/s - Fundamental frequency: 4.974 kHz - Number of points: 16384 - Fundamental input voltage: FSR -1 dB FS |
| | U2331A | - Sampling rate: 3 MSa/s - Fundamental frequency: 29.892 kHz - Number of points: 65536 - Fundamental input voltage: FSR -1 dB FS |

High density multifunction USB DAQ (continued)

| Model number | U2355A, U2356A | | U2331A | |
|--|-------------------------------------|---------------------------------|-------------------------------------|---------------------------------|
| Analog output measurement ¹ | | | | |
| Function | 23 °C ± 5 °C | 0 °C to 18 °C 28 °C to 45 °C | 23 °C ± 5 °C | 0 °C to 18 °C 28 °C to 45 °C |
| Offset error | ±1 mV | ±4 mV | ±1.5 mV | ±3 mV |
| Gain error | ±4 mV | ±5 mV | ±4 mV | ±5 mV |
| Slew rate | 19 V/μs | | 19 V/μs | |
| Rise time | 0.9 μs | | 0.9 μs | |
| Fall time | 0.9 μs | | 0.9 μs | |
| Settling time to 1% output error | 4 μs | | 4 μs | |
| Driving capability | 5 mA | | 5 mA | |
| Glitch energy | 5 ns-V (Typical), 80 ns-V (Maximum) | | 5 ns-V (Typical), 80 ns-V (Maximum) | |

1. Specifications are for 20 minutes of warm-up time, calibration temperature at 23 °C and input range of ±10 V.

DC Characteristics

Accuracy specifications

| Model Number | | U2351A, U2352A, U2353A, U2354A | |
|--------------------|--------------------------------|--------------------------------|---|
| Analog Input | | | |
| Unipolar Range (V) | Offset Error (mV) ¹ | Gain Error (mV) | Accuracy (% of reading + offset error) ² |
| 10 | 1.5 | 2.0 | 0.04% + 1.5 mV |
| 5 | 1.5 | 2.0 | 0.08% + 1.5 mV |
| 2.5 | 1.0 | 1.0 | 0.08% + 1.0 mV |
| 1.25 | 1.0 | 1.0 | 0.16% + 1.0 mV |
| Bipolar Range (V) | Offset Error (mV) ¹ | Gain Error (mV) | Accuracy (% of reading + offset error) ² |
| 10 | 1.0 | 2.0 | 0.02% + 1.0 mV |
| 5 | 1.0 | 2.0 | 0.04% + 1.0 mV |
| 2.5 | 1.0 | 1.5 | 0.06% + 1.0 mV |
| 1.25 | 1.0 | 1.5 | 0.12% + 1.0 mV |

| Model Number | | U2355A, U2356A | |
|--------------------|--------------------------------|-----------------|---|
| Unipolar Range (V) | Offset Error (mV) ¹ | Gain Error (mV) | Accuracy (% of reading + offset error) ² |
| 10 | 1.0 | 1.5 | 0.03% + 1.0 mV |
| 5 | 1.0 | 1.5 | 0.06% + 1.0 mV |
| 2.5 | 1.0 | 1.0 | 0.08% + 1.0 mV |
| 1.25 | 1.0 | 1.0 | 0.16% + 1.0 mV |
| Bipolar Range (V) | Offset Error (mV) ¹ | Gain Error (mV) | Accuracy (% of reading + offset error) ² |
| 10 | 1.0 | 2.0 | 0.02% + 1.0 mV |
| 5 | 1.0 | 2.0 | 0.04% + 1.0 mV |
| 2.5 | 1.0 | 1.5 | 0.06% + 1.0 mV |
| 1.25 | 1.0 | 1.5 | 0.12% + 1.0 mV |

| Model | U2331A | | |
|--------------------|--------------------------------|-----------------|---|
| Unipolar Range (V) | Offset Error (mV) ¹ | Gain Error (mV) | Accuracy (% of reading + offset error) ² |
| 10 | 1.5 | 4.0 | 0.08% + 1.5 mV |
| 5 | 1.5 | 2.0 | 0.08% + 1.5 mV |
| 4 | 1.5 | 2.0 | 0.10% + 1.5 mV |
| 2.5 | 1.0 | 1.5 | 0.12% + 1.0 mV |
| 2 | 1.0 | 1.0 | 0.10% + 1.0 mV |
| 1 | 1.0 | 1.0 | 0.20% + 1.0 mV |
| 0.5 | 1.0 | 1.0 | 0.41% + 1.0 mV |
| 0.4 | 1.0 | 1.0 | 0.51% + 1.0 mV |
| 0.1 | 1.0 | 1.0 | 2.04% + 1.0 mV |

- The above specifications are typical for 23 °C.
- Specifications are for 20 minutes warm-up and self calibration.
- The measurement are calculated with 100 points averaging of data.

1. Offset error is measured at midscale of full range.
 2. Accuracy = ± [% of |(Gain error / (Measured value – Midscale of FSR))| + Offset error]

Accuracy specifications (continued)

| Model | | U2331A | | |
|-------------------|--------------------------------|-----------------|---|--|
| Bipolar Range (V) | Offset Error (mV) ¹ | Gain Error (mV) | Accuracy (% of reading + offset error) ² | |
| 10 | 2.0 | 6.0 | 0.06% + 2.0 mV | |
| 5 | 1.5 | 4.0 | 0.08% + 1.5 mV | |
| 2.5 | 1.5 | 2.0 | 0.08% + 1.5 mV | |
| 1.25 | 1.0 | 1.5 | 0.12% + 1.0 mV | |
| 1 | 1.0 | 1.0 | 0.10% + 1.0 mV | |
| 0.5 | 1.0 | 1.0 | 0.20% + 1.0 mV | |
| 0.25 | 1.0 | 1.0 | 0.40% + 1.0 mV | |
| 0.2 | 1.0 | 1.0 | 0.50% + 1.0 mV | |
| 0.05 | 1.0 | 1.0 | 2.02% + 1.0 mV | |

- The above specifications are typical for 23 °C.
- Specifications are for 20 minutes warm-up and self calibration.
- The measurement are calculated with 100 points averaging of data.

| Model | | U2351A, U2352A, U2353A, U2354A | | |
|--------------------|--------------------------------|--------------------------------|---|--|
| Analog output | | | | |
| Unipolar Range (V) | Offset Error (mV) ³ | Gain Error (mV) | Accuracy (% of reading + offset error) ⁴ | |
| 10 | 1.0 | 2.0 | 0.02% + 1.0 mV | |
| Bipolar Range (V) | Offset Error (mV) ³ | Gain Error (mV) | Accuracy (% of reading + offset error) ⁴ | |
| 10 | 1.0 | 4.0 | 0.04% + 1.0 mV | |

| Model | | U2355A, U2356A | | |
|--------------------|--------------------------------|-----------------|---|--|
| Unipolar Range (V) | Offset Error (mV) ³ | Gain Error (mV) | Accuracy (% of reading + offset error) ⁴ | |
| 10 | 1.0 | 2.0 | 0.02% + 1.0 mV | |
| Bipolar Range (V) | Offset Error (mV) ³ | Gain Error (mV) | Accuracy (% of reading + offset error) ⁴ | |
| 10 | 1.0 | 4.0 | 0.04% + 1.0 mV | |

| Model | | U2331A | | |
|--------------------|--------------------------------|-----------------|---|--|
| Unipolar Range (V) | Offset Error (mV) ³ | Gain Error (mV) | Accuracy (% of reading + offset error) ⁴ | |
| 10 | 2.5 | 4.0 | 0.04% + 2.5 mV | |
| Bipolar Range (V) | Offset Error (mV) ³ | Gain Error (mV) | Accuracy (% of reading + offset error) ⁴ | |
| 10 | 1.5 | 4.0 | 0.04% + 1.5 mV | |

- The above specifications are typical for 23 °C.
- Specifications are for 20 minutes warm-up and self calibration.

1. Offset error is measured at midscale of full range.
2. Accuracy = ± [% of |(Gain error / (Measured value – Midscale of FSR))| + Offset error]
3. Offset error is measured at 0 V.
4. Accuracy = ± [% of |Gain error/Output value| + Offset voltage]


Keysight Measurement Manager

The Keysight Measurement Manager (AMM) is an application data viewer software that comes as standard with purchase of the U2300A Series USB Modular Multifunction DAQ devices. This software is designed to help you perform quick device configuration, data logging and data acquisition using the products.

Supported features found in the U2300A Series USB DAQ devices:

- Command logger
- Self-calibration
- Option to save the current instrument configuration to a file
- Data logging and export feature to CSV, HTML and text only format files that can be printed
- Data viewer to load and review previously logged data
- Trigger settings between modules in the instrument chassis with Star trigger and Master/Slave trigger
- Synchronization display and data logging for modules in the instrument chassis

Prior to installing the Keysight Measurement Manager software, ensure that your PC meets the following minimum system requirements for installation and operation.

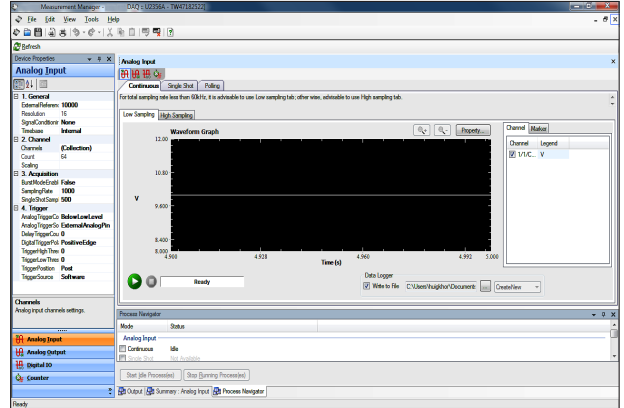

| Requirement | Windows XP operating systems | Windows Vista operating systems | Windows 7 operating systems |
|--|---|---|---|
| Operating system | Windows XP Service Pack 3 (or later) ¹ | Windows Vista (32-bit) Service Pack 1 and 2 ² | Windows 7 (32-bit and 64-bit) ^{3,4} |
| Processor speed | 600 MHz or higher required, 800 MHz recommended | 1 GHz 32-bit (x86) | 3 GHz 32-bit (x86) |
| Memory | 256 MB minimum (1 GB or greater recommended) | 1 GB minimum | 2 GB minimum |
| Hard-disk space | 1.5 GB minimum | 1.5 GB minimum | 1.5 GB minimum |
| Video | Super VGA (800 × 600) 256 colors or more | Support for DirectX 9 graphics with 128 MB graphics memory recommended ⁵ | Support for DirectX 9 graphics with 128 MB graphics memory recommended ⁵ |
| CD-ROM drive or DVD-ROM drive ⁶ | Required | Required | Required |
| Browser | Microsoft Internet Explorer 5.01 or greater | Microsoft Internet Explorer 7 or greater | Microsoft Internet Explorer 7 or greater |

1. Supported Windows XP editions – Home or Professional

2. Supported Windows Vista (32-bit) editions – Home Basic, Home Premium, Business, or Ultimate

3. Supported Windows 7 (32-bit and 64-bit) editions – Home Basic, Home Premium, Professional, Enterprise, or Ultimate

4. Keysight Measurement Manger for Windows 7 64-bit support is a 32-bit application running on a WOW64 (Windows-on-Windows 64-bit) emulat

5. Super VGA graphics is supported for Windows Vista and Windows 7.

6. The type of media provided with the product determines whether a CD-ROM drive or DVD-ROM drive is required.

Software requirements

Keysight IO Libraries Suite 15.1 and above¹

Keysight T&M Toolkit Runtime version 2.1²

Keysight T&M Toolkit Redistributable Package 2.1 patch²

Microsoft .NET Framework version 2.0²

1. Available on the Keysight Automation-Ready CD-ROM

2. Bundled with Keysight Measurement Manager software application installer

USB Modular DAQ App within BenchVue

BenchVue software for the PC makes it simple to connect, control, capture and view multiple Keysight instruments simultaneously with no additional programming. You can derive answers faster than ever by easily viewing, logging and exporting measurement data and screen images with a few clicks from a single environment.

- Visualize multiple measurements simultaneously
- Easily log data, screen shots and system state
- Rapidly prototype custom test sequences
- Recall past states of your USB Modular DAQ device to replicate results
- Export measurement data in the desired format fast
- Quickly access manuals, drivers, FAQs and videos

The USB Modular DAQ App within BenchVue allows you to quickly configure and control any of the USB DAQ devices to perform data logging and visualize measurements. With six different display options, including grids and strip charts, zooming in to details the way you want is so much easier—so you can nail that measurement error in no time. In just a few clicks, you can also record measurements and export results to popular PC-friendly applications such as Microsoft Excel and Microsoft Word for further analysis. Upgrading to the Pro version (BV0025A) will provide you with unrestricted data logging with limit checking and alerts.



View measurements across USB DAQ, modular and bench instruments all on one BenchVue interface.

Get started with BenchVue, downloadable at no cost at www.keysight.com/find/benchvue.



Configure and visualize measurements flexibly and easily on BenchVue's modern interface.

Optional Accessories: U2802A Thermocouple Input Signal Conditioner

The Keysight U2802A is a 31-channel Thermocouple Input Signal Conditioner with a built-in thermistor for cold junction compensation. The U2802A converts low input voltage signals (less than ± 100 mV) from a thermocouple into an output voltage range suitable for data acquisition devices (± 10 V). The U2802A is designed for use with the U2355A/U2356A USB Modular Multifunction DAQ device for temperature measurements with thermocouples (standalone operation only). The U2802A can be attached to the DAQ device via two SCSI-II 68 conductor cables. The thermocouple complements eight standard thermocouple types which caters to a wide range of application and industrial settings.

Features to meet your demands

- 31 input channels that can be independently configured to either differential thermocouple input mode, single-ended voltage input mode, or differential voltage input mode using two input channels set to voltage input mode
- Supports the standard thermocouple types (J, K, R, S, T, N, E, and B) defined in the NIST ITS-90 Thermocouple Database
- Error detection for open thermocouple channels
- Built-in isothermal construction on terminal block for improved measurement accuracy
- Built-in thermistor for cold junction compensation
- Built-in zeroing function to compensate for overall system offset errors due to temperature drift and long term drift
- Up to ± 10 V input voltage range for higher voltage inputs
- Sampling rate of 500 kSa/s for overall module
- Sampling rate of 10 kSa/s total for all channels in thermocouple mode
- Quick and easy USB setup
- Robust, cost-effective, and user friendly

Applications

The U2802A Thermocouple Input Signal Conditioner can be used in various applications, including:

- Product thermal analysis and characterization
- Environmental chamber profiling
- Process monitoring in consumer electronics markets
- Material properties testing in education environments
- Study of electronic temperature properties
- Appliances testing



Thermocouple input mode

In thermocouple input mode, the U2802A can acquire up to ± 100 mV input signals. Each channel includes an instrumentation amplifier and a 4 Hz low-pass filter. The low-pass filter removes unwanted noise from the thermocouple wires to obtain accurate measurement data.

Voltage input mode

Alternatively, you can select separate voltage input modes for each channel. The channel will be set to bypass the amplifier and filter, allowing up to ± 10 V input signals to be directly routed to the DAQ device analog input. The bandwidth in this mode is more than 500 kHz.

Zero mode

In zero mode, the positive and negative inputs of the instrumentation amplifier are shorted together. The voltage measured in this mode corresponds to the offset voltage of the channel. You can subtract this offset voltage from subsequent thermocouple mode measurements to increase measurement accuracy. This mode is only applicable in thermocouple mode.

Thermocouple compatibility

The U2802A is compatible with a wide range of standard thermocouple types defined in the NIST ITS-90 Thermocouple Database. This includes types J, K, R, S, T, N, E, and B.

Open thermocouple detection

The U2802A includes open thermocouple detection circuitry to indicate the presence of an open thermocouple.

Calibration EEPROM

The U2802A gain and offset calibration factors for each channel are stored in the EEPROM during factory calibration and can be retrieved prior to taking measurements. This on-board EEPROM also stores the module ID, serial number, and date of calibration for your reference. A section of the EEPROM is also allocated for you to save your calibration data.

Restoring factory calibration


Using the AMM software, you can easily restore the U2802A calibration data from your settings to the original factory settings.



U2802A product outlook and dimensions



Top and side view

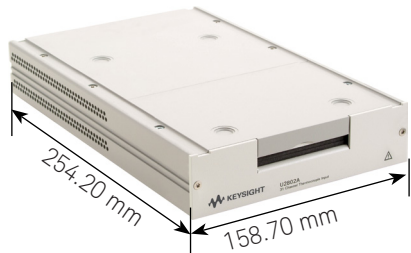

Standard shipped accessories

- Power supply splitter
- Two 68-pin SCSI cables (1 m)
- One J-type thermocouple
- Keysight U2802A 31-Channel Thermocouple Input Device Quick Start Guide
- Keysight USB Modular Products Reference CD-ROM
- Keysight Automation-Ready CD-ROM (contains the Keysight IO Libraries Suite)
- Certificate of Calibration

U2802A product characteristics and general specifications

Power consumption
+12 VDC, 480 mA maximum

Operating environment

- Operating temperature from 0 °C to +55 °C
- Relative humidity at 50% to 85% RH (non-condensing)
- Altitude up to 2000 meters

Storage compliance

-40 °C to 70 °C

Safety compliance

Certified with:

- IEC 61010-1:2001/EN 61010-1:2001 (2nd Edition)

EMC compliance

- IEC 61326-1:2002/EN 61326-1:1997+A2:2001+A3:2003
- CISPR 11: 1990/EN 55011:1990-Group 1 Class A
- Canada: ICES-001:2004
- Australia/New Zealand: AS/NZS CISPR 11:2004

Shock and vibration

Tested to IEC/EN 60068-2

IO connector

- 2 × 68-pin female SCSI connector
- 2 × 34 pin screw terminal block
- 1 × 24 pin screw terminal block

Dimension (W × D × H)

158.70 mm × 254.20 mm × 40.50 mm

Weight

1.036 kg

Warranty

Three years for U2802A

Three months for standard shipped accessories









U2802A Product Specifications

| General characteristics | |
|---|--|
| Number of channels | 31 differential and 1 CJC |
| Input voltage range for voltage mode | ± 10 V (signal + common mode) |
| Input voltage (thermocouple mode) | ± 100 mV |
| Sampling rate for thermocouple mode | 10 kSa/s total for all channels |
| Sampling rate for overall module | 500 kSa/s |
| Thermocouple types | J, K, R, S, T, N, E, and B |
| Input specifications | |
| Accuracy (thermocouple mode) | |
| – Overall gain error | 0.06% ($23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$) |
| – Overall offset error | 15 μV (without zeroing) ($23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$) 6 μV (with zeroing) |
| – Nonlinearity | < 0.005% of full scale range |
| System noise (rms) | |
| – Gain ($\times 1$) | 100 μVrms |
| – Gain ($\times 100$) | 5 μVrms |
| Common Mode Rejection Ratio (CMRR) | |
| – Voltage mode | > 60 dB |
| – Thermocouple mode | > 80 dB |
| Cold junction accuracy | $\pm 1.0\text{ }^{\circ}\text{C}$ typical ($23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$) $\pm 1.5\text{ }^{\circ}\text{C}$ typical ($0\text{ }^{\circ}\text{C}$ to $18\text{ }^{\circ}\text{C}$, $28\text{ }^{\circ}\text{C}$ to $55\text{ }^{\circ}\text{C}$) |
| Input characteristics | |
| Bandwidth (voltage mode) | > 500 kHz |
| Bandwidth (thermocouple mode) | 4.0 Hz |
| Overvoltage protection ¹ | TC Mode ² – Common mode: ± 17 V (TC+ and TC– with respect to GND) – Differential mode: ± 7 V (Differential voltage between TC+ and TC–) Bypass mode ± 20 V (TC+ input with respect to GND) Power-off Mode ± 11 V (TC+, TC– input with respect to GND) |
| Input impedance | > 1 G Ω |
| Input bias current | ± 2.5 nA max |
| Input offset current | ± 1.5 nA max |
| Gain drift | 60 ppm/ $^{\circ}\text{C}$ max |
| Offset drift | 1 $\mu\text{V}/^{\circ}\text{C}$ max |
| Filter cutoff frequency (–3 dB) (thermocouple mode) | 4.0 Hz |
| Filter type (thermocouple mode) | Low Pass RC Filter |
| Other features | |
| Recommended warm up time | 30 minutes |

1. The overvoltage protection levels specified above indicate the maximum voltage each input pin can tolerate without resulting in any damages. However, prolonged exposure to these levels may affect device safety and reliability. Hence, it should be avoided where possible.
2. On the channels configured for thermocouple mode, the TC+ and TC– pins can tolerate up to ± 17 V of differential voltage for a few minutes. However, exceeding a voltage range of ± 100 mV on these channels can cause additional current to be drawn from the device's power supply regulators, which may damage the device if multiple channels are overdriven for prolonged periods. This is the case when a voltage source is tied across the TC_n+ and TC_n– pin. Voltage sources greater than ± 100 mV should be tied to TC_n+ and GND (floating source), or TC_n+ and TC_{n+1}+ (grounded source), and have the channels set for bypass mode.

Thermocouples Typical Measurement Accuracy

The U2802A measurement error with U2355A or U2356A at $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ is shown below.

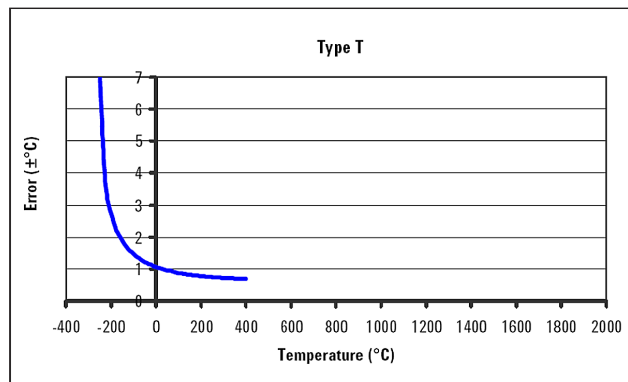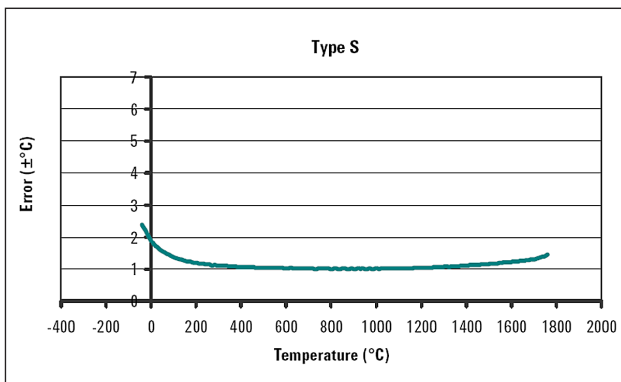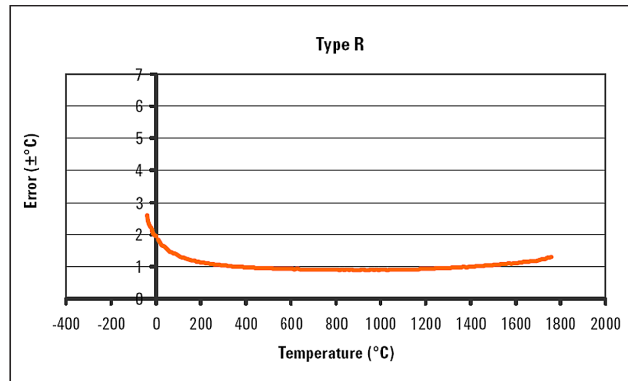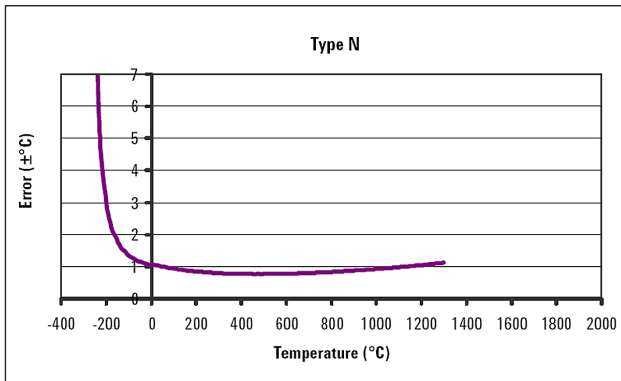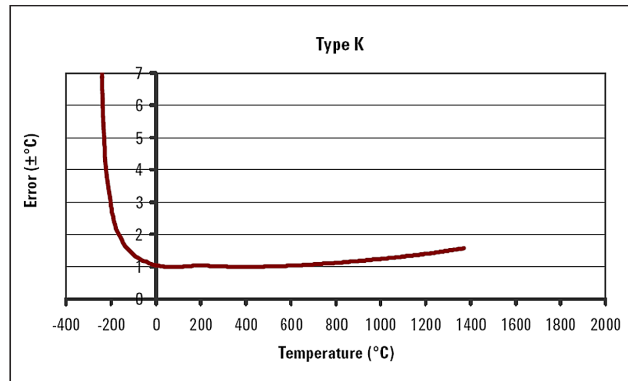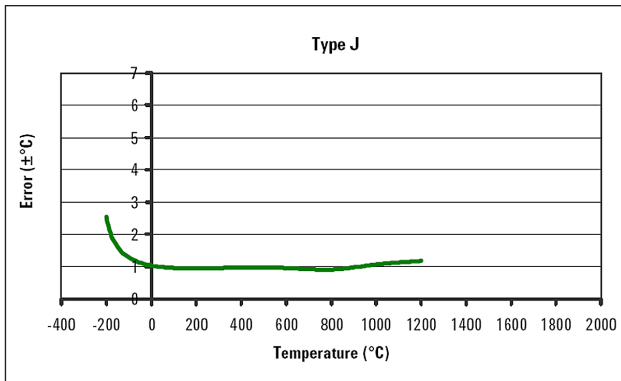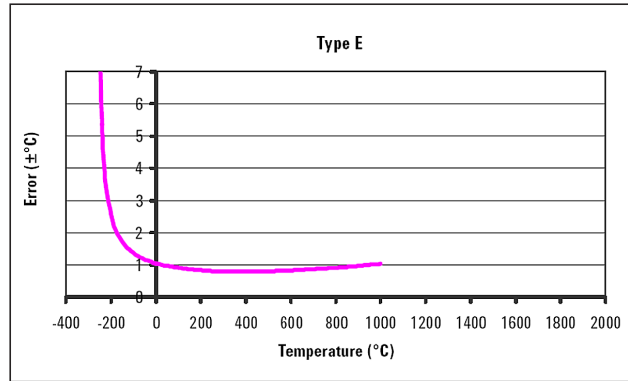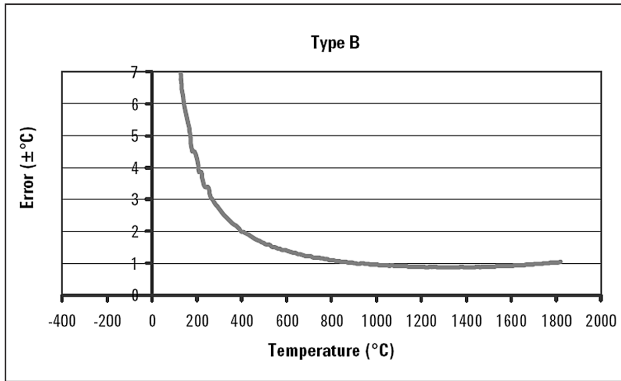

System Accuracy Specifications

The U2802A system accuracy specifications are shown in Table 1, Table 2, and Table 3. These measurements are derived from the U2802A and DAQ input accuracy specifications without including the thermocouple error. Refer to “Calculating System Accuracy” section in the Keysight U2802A 31-Channel Thermocouple Input Device User’s Guide for calculation methodology.

Table 1. Measurement accuracy of the U2355A and U2356A at 23 °C ± 5 °C

| Thermocouple measurement accuracy (U2355A, U2356A at 23 °C ± 5 °C) | | | | | | | |
|--|-------------------------------|------|-------------------------------|------|--------------------------|----------------------------|-----------------------------|
| T/C type | ITS-90 Temperature range (°C) | | Optimum measurement range(°C) | | Without averaging (± °C) | 50 points averaging (± °C) | 500 points averaging (± °C) |
| | Low | High | Low | High | | | |
| B | 0 | 1820 | 1100 | 1820 | 1.9 | 1.2 | 1.0 |
| | | | 400 | 1100 | 4.4 | 2.5 | 2.0 |
| E | -270 | 1000 | -150 | 1000 | 1.7 | 1.6 | 1.6 |
| | | | -200 | -150 | 2.4 | 2.3 | 2.3 |
| J | -210 | 1200 | -150 | 1200 | 1.6 | 1.5 | 1.5 |
| | | | -210 | -150 | 2.7 | 2.6 | 2.5 |
| K | -270 | 1372 | -100 | 1200 | 1.5 | 1.4 | 1.4 |
| | | | -200 | -100 | 2.7 | 2.6 | 2.6 |
| N | -270 | 1300 | -100 | 1300 | 1.5 | 1.3 | 1.3 |
| | | | -200 | -100 | 3.0 | 2.7 | 2.6 |
| R | -50 | 1768 | 300 | 1760 | 2.0 | 1.4 | 1.3 |
| | | | -50 | 300 | 5.0 | 3.1 | 2.6 |
| S | -50 | 1768 | 400 | 1760 | 2.1 | 1.6 | 1.4 |
| | | | -50 | 400 | 4.5 | 2.8 | 2.4 |
| T | -270 | 400 | -100 | 400 | 1.5 | 1.4 | 1.4 |
| | | | -200 | -100 | 2.7 | 2.5 | 2.5 |

Table 2. Measurement accuracy of the U2355A at 0 to 18 °C and 28 to 45 °C

| Thermocouple measurement accuracy (U2355A at 0 to 18 °C and 28 to 45 °C) | | | | | | | |
|--|-------------------------------|------|--------------------------------|------|--------------------------|----------------------------|-----------------------------|
| T/C type | ITS-90 Temperature range (°C) | | Optimum measurement range (°C) | | Without averaging (± °C) | 50 points averaging (± °C) | 500 points averaging (± °C) |
| | Low | High | Low | High | | | |
| B | 0 | 1820 | 1100 | 1820 | 3.4 | 2.4 | 2.2 |
| | | | 400 | 1100 | 7.5 | 3.6 | 2.2 |
| E | -270 | 1000 | -150 | 1000 | 2.7 | 2.6 | 2.5 |
| | | | -200 | -150 | 3.8 | 3.6 | 3.6 |
| J | -210 | 1200 | -150 | 1200 | 2.5 | 2.4 | 2.4 |
| | | | -210 | -150 | 4.2 | 4.0 | 3.9 |
| K | -270 | 1372 | -100 | 1200 | 2.9 | 2.8 | 2.8 |
| | | | -200 | -100 | 4.3 | 4.0 | 3.9 |
| N | -270 | 1300 | -100 | 1300 | 2.6 | 2.5 | 2.5 |
| | | | -200 | -100 | 4.9 | 4.2 | 4.0 |
| R | -50 | 1768 | 300 | 1760 | 3.8 | 3.1 | 3.0 |
| | | | -50 | 300 | 8.5 | 4.6 | 3.3 |
| S | -50 | 1768 | 400 | 1760 | 4.2 | 3.4 | 3.2 |
| | | | -50 | 400 | 7.7 | 4.2 | 3.1 |
| T | -270 | 400 | -100 | 400 | 2.4 | 2.2 | 2.2 |
| | | | -200 | -100 | 4.3 | 4.3 | 3.9 |

Table 3. Measurement accuracy of the U2356A at 0 to 18 °C and 28 to 45 °C


| Thermocouple measurement accuracy (U2356A @ 0 to 18 °C and 28 to 45 °C) | | | | | | | |
|---|-------------------------------|------|--------------------------------|------|--------------------------|----------------------------|-----------------------------|
| T/C type | ITS-90 Temperature range (°C) | | Optimum measurement range (°C) | | Without averaging (± °C) | 50 points averaging (± °C) | 500 points averaging (± °C) |
| | Low | High | Low | High | | | |
| B | 0 | 1820 | 1100 | 1820 | 6.1 | 3.1 | 2.4 |
| | | | 400 | 1100 | 14.4 | 6.3 | 2.7 |
| E | -270 | 1000 | -150 | 1000 | 3.0 | 2.6 | 2.6 |
| | | | -200 | -150 | 4.2 | 3.7 | 3.6 |
| J | -210 | 1200 | -150 | 1200 | 2.9 | 2.5 | 2.5 |
| | | | -210 | -150 | 4.9 | 4.1 | 4.0 |
| K | -270 | 1372 | -100 | 1200 | 3.3 | 2.9 | 2.9 |
| | | | -200 | -100 | 5.3 | 4.2 | 4.0 |
| N | -270 | 1300 | -100 | 1300 | 3.4 | 2.7 | 2.6 |
| | | | -200 | -100 | 6.8 | 4.6 | 4.1 |
| R | -50 | 1768 | 300 | 1760 | 6.2 | 3.7 | 3.2 |
| | | | -50 | 300 | 15.7 | 7.2 | 3.8 |
| S | -50 | 1768 | 400 | 1760 | 6.4 | 4.0 | 3.4 |
| | | | -50 | 400 | 14.2 | 6.6 | 3.4 |
| T | -270 | 400 | -100 | 400 | 3.0 | 2.4 | 2.2 |
| | | | -200 | -100 | 5.3 | 4.2 | 3.9 |

Optional Accessories: U2901A/U2902A Terminal block and SCSI-II 68-pin connector with 1-meter/2-meter cable


The U2901A/U2902A is a terminal block and SCSI-II 68-pin connector with 1 meter cable or 2 meter cable that can be used conjunction with the U2300A Series and U2500A Series.

Terminal block overview

Front view

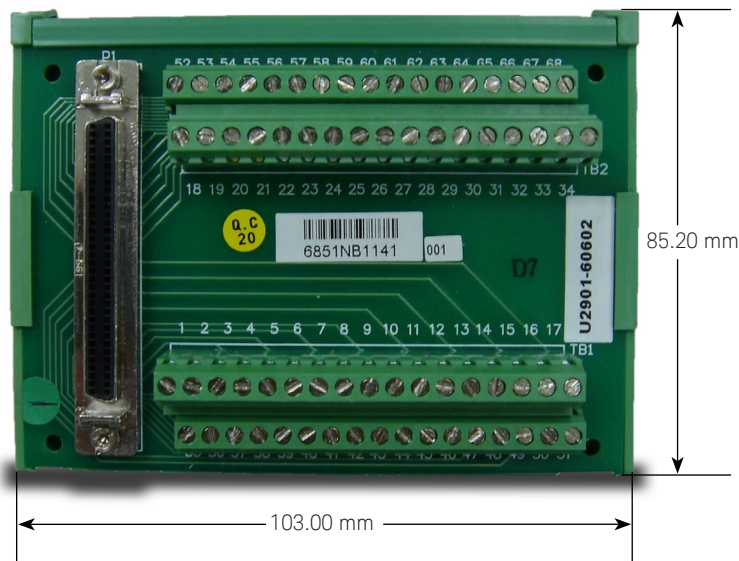

Side view

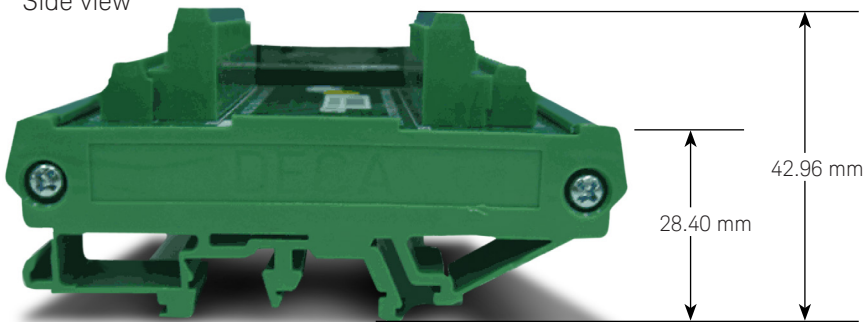

Ordering Information

| Model | Description |
|--------|--|
| U2351A | 16-Channel 250kSa/s USB modular multifunction DAQ |
| U2352A | 16-Channel 250kSa/s USB modular multifunction DAQ; without analog output |
| U2353A | 16-Channel 500kSa/s USB modular multifunction DAQ |
| U2354A | 16-Channel 500kSa/s USB modular multifunction DAQ; without analog output |
| U2355A | 64-Channel 250kSa/s USB modular multifunction DAQ |
| U2356A | 64-Channel 500kSa/s USB modular multifunction DAQ |
| U2331A | 64-Channel 1MSa/s USB modular multifunction DAQ |

Optional accessories

| Model | Description |
|--------|--|
| U2802A | U2802A 31-Channel Thermocouple Input Device |
| U2901A | Terminal block and SCSI-II 68-pin connector with 1-meter cable |
| U2902A | Terminal block and SCSI-II 68-pin connector with 2-meter cable |

Other Products in the Keysight USB Modular Data Acquisition (DAQ) Family



U2500A Series USB Modular Simultaneous Sampling Multifunction DAQ

Features:

- High analog input sampling rate coverage of up to 2 MSa/s for a each channel
- High speed USB 2.0
- Simultaneous acquisition of multiple data points
- Multifunction capabilities – analog input (AI), analog output (AO), digital input output (DIO), and counter

For more information: www.keysight.com/find/U2500A



U2600A Series USB Modular Isolated Digital I/O

Features:

- 64 opto-isolated lines that can meet demand up to 24 V
- High speed USB 2.0
- Isolation voltage of 1250 Vrms for protection from transient voltage spikes

For more information: www.keysight.com/find/U2600A



U2781A USB Modular Product Chassis

Features:

- Expansion of channels for each modular product
- Multiple instrument synchronization
- Internal and external 10 MHz reference clock
- High-speed USB 2.0
- SSI/Star trigger bus synchronization between external trigger source and modules

For more information: www.keysight.com/find/U2781A

Evolving

Our unique combination of hardware, software, support, and people can help you reach your next breakthrough. **We are unlocking the future of technology.**



From Hewlett-Packard to Agilent to Keysight

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

| | |
|---------------|------------------|
| Canada | (877) 894 4414 |
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 11 2626 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | |
|----------------|---------------|
| Austria | 0800 001122 |
| Belgium | 0800 58580 |
| Finland | 0800 523252 |
| France | 0805 980333 |
| Germany | 0800 6270999 |
| Ireland | 1800 832700 |
| Israel | 1 809 343051 |
| Italy | 800 599100 |
| Luxembourg | +32 800 58580 |
| Netherlands | 0800 0233200 |
| Russia | 8800 5009286 |
| Spain | 800 000154 |
| Sweden | 0200 882255 |
| Switzerland | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| United Kingdom | 0800 0260637 |

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-2-23-17)

DEKRA Certified
 ISO 9001 Quality Management System

www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

myKeysight

myKeysight
www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
 Lower costs.

Keysight Services
www.keysight.com/find/service

Our deep offering in design, test, and measurement services deploys an industry-leading array of people, processes, and tools. The result? We help you implement new technologies and engineer improved processes that lower costs.



Three-Year Warranty
www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans
www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners
www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/U2300A